

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
10P319372

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LETTER INPUT METHOD AND DEVICE USING THE SAME

and invented by:

Mitsuhiro WatanabeIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 69 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
10P319372

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal Number of Sheets 26
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail *(Specify Label No.):* HAND DELIVERED

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
10P319372

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	22	- 20 =	2	x \$18.00	\$36.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$796.00

- ☒ A check in the amount of \$796.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 23-1951 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

C. Lamont Whitham
Reg. No. 22,424

Dated: November 8, 1999

Whitham, Curtis & Whitham
Reston International Center
11800 Sunrise Valley Drive, Suite 900
Reston, VA 20191
(703)391-2510

cc:

LAW OFFICES
WHITHAM, CURTIS & WHITHAM, PLC
INTELLECTUAL PROPERTY LAW
11800 SUNRISE VALLEY DRIVE, SUITE 900
RESTON, VIRGINIA 20191

APPLICATION
FOR
UNITED STATES
LETTERS PATENT

Applicants: Mitsuhiro Watanabe
For: LETTER INPUT METHOD AND DEVICE
USING THE SAME
Docket No.: 10P319372

653011 3663460

LETTER INPUT METHOD AND DEVICE USING THE SAME
BACKGROUND OF THE INVENTION

The present invention relates to letter input methods and devices and, more particularly, to
5 small-size Japanese letter input devices for portable terminals.

Among usual letter input means are keyboards with key top impression of alphabets, numerals, Japanese kana letters, etc. and also ten key sets used for portable
10 telephone sets or the like.

Among other typical letter input devices are touch panels. A touch panel is a letter input device for inputting position data corresponding to its touched spot. This device has an integral display with a
15 keyboard display thereon. By touching the keyboard display at spot thereof, corresponding letter data is inputted.

Japanese Patent Laid-Open No. 63-58590 entitled "Vector Pattern Input Device" discloses a character
20 input device using a touch panel. In this device, characters are inputted by recognizing them from strokes drawn on the touch panel.

Japanese Patent Laid-Open No. 6-161433 entitled "Electronic Musical Instrument with Letter Input
25 Function" discloses a device using a rotary dial, which is rotatable for displaying letters on a display. In this device, Letters are inputted when they are displayed. This device has a set selection switch for selecting a

numeral set and a large and a small alphabet letter set. The large and small letter sets are selected by depressing the switch.

Japanese Patent Laid-Open No. 7-129294 entitled
5 "Letter Input Device" discloses a letter input device, which permits inputting letters with a single hand. To this end, the device comprises a frame, which is of such a size that it can be gripped with a single hand and has a rotor capable of being rotated with the thumb and a
10 key switch operable with a finger other than the thumb. In this device, letters are inputted by deducing a vowel row from a detected angle of rotation of a rotary bar and deducing a consonant column from a detected state of depression of a key switch.

15 Japanese Patent Laid-Open No. 7-168658 entitled "Letter Input Device and Method" discloses input of letters by using a track pole and a set of step-wise depression adjustment switches. In this case, four switches capable of detecting five depression steps are
20 used to determine letters to be inputted, and a track pole is used to cause movement of a cursor displayed on a display. In this way, the input of letters and the cursor operation are permitted.

Japanese Patent Laid-Open No. 6-202807 entitled
25 "Letter Input/Display Device" discloses an input device using a mouth. In the device, a table of letters is partly displayed on a display for scrolling by moving a mouth. When a desired letter appears, it can be

inputted by clicking the mouth.

Japanese Patent Laid-Open No. 6-131095 entitled "Japanese Kana Letter Input System Based on Pointing Device" discloses combined use of a pointing device and
5 a push button switch having a single button capable of being depressed in a plurality of different steps. In this case, certain steps of depression of the button are allotted to the sonant mark and p-sound mark of Japanese kana letters. The input of Japanese kana letters is
10 thus simplified by the combination of the 50-letter set displayed on a display and the button.

Japanese Patent Laid-Open No. 5-341903 entitled "Letter Information Input Device" discloses simplified letter input. In this case, a tablet is used, and a
15 keyboard display is made on a display. In this letter information input device, a letter is not inputted absolutely by pointing a position on the display. Instead, the letter is inputted according to position relative to the pointed position, that is, touch feel
20 letter input is possible without reference to the display.

The above first-mentioned case of letter input by using a usual keyboard, has the following problems. Where romaji letters are inputted with a keyboard, at
25 least 26 letter keys are necessary in addition to a large/small letter size switch key and numeral keys, that is, a total of at least 40 keys are necessary.

In addition, where these keys are to be depressed

with fingers, the size of each of key in the set can not be made smaller than is necessary for being depressed with a finger. Thus, a large area is required as a whole.

This input method poses no problem in the case of
5 a relatively large device used on a desk, such as a desk top personal computer or a note personal computer. However, in relatively small portable terminals such as PDAs (personal digital assistants), it is not so realistic to mount a keyboard. Besides, in the case of
10 a PDA or like terminal which is relatively frequently held and used with a single hand rather than being put on a desk, it is extremely difficult to input letters with a keyboard.

The above second case, in which a touch panel is
15 used for letter recognition, has the following problems. In a small-size device such as a portable telephone set or like portable terminal, if it is intended to secure a hand-written letter input area for letter recognition, the display area of the screen is reduced, thus making
20 it difficult to input a sentence. In addition, for inputting letters it is necessary to use in combination a pen or like relatively thin input device with a pointed tip. This means that a pen or the like should always be carried and be taken out whenever letter data is to be
25 inputted. Moreover, in such a situation it is necessary to use the pen while holding the device body with one hand. That is, it is necessary to hold the pen with one hand while holding the body with the other hand. Both

hands are thus occupied.

The above third-mentioned case, which is an electronic musical instrument with a letter input function and having a dial for selecting letters and also
5 a set selection switch for selecting a small or a large letter set, has the following problem. For detecting a letter on the diametrically opposite dial side of a presently selected letter, i.e., 180-degree out-of-phase therefrom, a number of finger operations are
10 necessary. It is thus difficult to continuously input a large number of letters.

The above fourth-mentioned letter input device has the following problems. In this case, a rotor is used to deduce vowel rows, and a key switch is used to deduce
15 consonant columns. However, it is difficult to determine by the sense of feel the rotation angle of the rotor corresponding to a vowel row to be selected. Also, it is difficult to determine by feel the number of times of depression of the key switch corresponding to a desired
20 consonant column to be selected. For letter selection, it is thus necessary such means that all the letters capable of being selected are always displayed on a display for selecting letters with reference to the display. Such a display of letters, however, requires
25 a corresponding display area. This means that it is difficult to input letters by viewing a sentence. Besides, since letters are inputted with two different kinds of switches, i.e., the rotor and a see-saw switch,

it is impossible to input letters with a single finger.

The above fifth-mentioned case of letter input, i.e., the letter input device and method using a plurality of step-wise depression adjustment switches for the letter input, has the following problems. In this case, positions of one of the switches which can be depressed step-wise is allotted to the vowels, and positions of the other switches are allotted to the consonants. This dictates the user to memorize the vowels and consonants corresponding to the respective switch positions.

However, it is rather difficult for the user to memorize these switch positions. In addition, the switches are adapted to produce clicks when they are depressed step-wise to the individual positions, and thus can be readily depressed to desired positions. However, since a plurality of switches are provided, their depression forces adjustment at a time is difficult.

The above sixth-mentioned case, i.e., the letter input/display device, in which the 50-letter set is displayed on a display for scrolling, and a desired letter is inputted with a determining button switch when it appears, has the following problem. In this case of letter input the display should be scrolled at a high speed such as on a display unit of a personal compute CRT monitor. However, in the case of a liquid crystal display in a portable terminal or the like, such scrolling makes it difficult to recognize the display and frequently makes it substantially impossible to select

letters.

The above seventh-mentioned case, i.e., the Japanese kana letter input system based on pointing device, has a problem that a Japanese kana letter set
5 should be displayed on a display. In a portable terminal or the like, the display area of the screen is too small to be able to display the kana letter set, or if such display is possible, the size of the individual displayed letters is extremely small. This means that it is
10 difficult to select letters.

The above eighth-mentioned case, i.e., the letter information input device, is applicable to devices without need of portability considerations. A problem in this case resides in the use of a tablet independently
15 of the display screen for the letter input. The tablet requires an extra space, and is therefore unsuited to the cases concerning the portability.

SUMMARY OF THE INVENTION

An object of the present invention is to provide
20 a letter input device for a portable terminal and a method thereof, which can solve the above problems and permits letters, particularly Japanese kana letters to be easily inputted with less necessary space.

Another object of the present invention is to
25 permit letter input even in a situation that both hands can not be used at a time, i.e., permit letter input with a single hand, without use of any such pointing device as a touch panel or a mouth.

A further object of the present invention is to permit letter selection with finger movement instead of selecting letters with reference to a letter table displayed on a display.

5 According to an embodiment of the present invention, there is provided a Japanese letter input method of inputting letters in a letter set used in a Japanese letter input device, the method comprising the steps of: prearranging predetermined letters and symbols in a
10 matrix array of M columns and N rows; and inputting any desired letter or symbol by designating corresponding column and row coordinates in a predetermined order with a position input means.

 The letter set is obtained by arranging kana
15 letters in the 50-letter set in a matrix array of columns and rows, the columns each consisting of letters assigned by the same consonant, the rows each consisting of letters of the same vowel, the symbols including the consonant mark and the p-sound mark.

20 The letter set is formed by arranging romaji alphabet letters, numerals and symbols in columns and rows.

 According to an embodiment of the present invention, there is provided a Japanese letter input device for a
25 portable terminal comprising: a direction designation unit having a plurality of (i.e., m) direction designation positions uniformly spaced apart in a circle with the consonant at a reference position and having

a predetermined radius, the direction designation unit including a pointer capable of being moved from the reference position radially in a two-dimensional plane and then circumferentially and then returned to the reference position, the direction designation unit being capable of detecting a first direction designation position, which the pointer is first radially moved to, and a second direction designation position, which the pointer is located at before being moved circumferentially and then returned to the reference position, and outputting position data of the detected direction designation position; a data processing unit for generating letter codes from the position data outputted from the direction designation unit by using a memory means with a letter set stored therein; and a display unit displaying the letter modes generated at the data processing unit.

The Japanese letter input device further comprises a buffer for temporarily storing input data of the direction designation unit.

In the Japanese letter input device, a plurality of letter sets are stored, and which further comprises a means for selecting each of the letter sets.

In the Japanese letter input device, one of the letter sets is in the form of an M-column N-row matrix array obtained by arranging kana letters in the 50-letter set in a matrix array of columns and rows, the columns each consisting of letters assigned by the same consonant,

the rows consisting of letters of the same level, and symbols including the consonant mark and the p-sound mark, direction designation positions being each allotted to each row of the letter set.

5 In the Japanese letter input device, one of the letter sets is obtained by arranging romaji alphabet letters, numerals and symbols in M columns and N rows.

 In the Japanese letter input device, the data processing unit selects a row of the letter set
10 corresponding to the first direction designating position represented by the position data outputted from the direction designation unit.

 In the Japanese letter input device, the data processing unit detects, upon reception of the position
15 data representing the second direction designation position from the direction designation unit, an interval of circumferential movement of the pointer from the difference between this position data and the previously received position data representing the first
20 direction designation position, selects a row of the letter set, and outputs, upon reception of a determination signal, a code of a particular letter or symbol in the letter set by combining the selected column and row of the letter set.

25 In the Japanese letter input device, the direction designation unit continuously outputs position data during movement of the pointer, and the data processing unit causes, upon reception of the position data of the

first direction designation position, a code
representing a row of the letter set corresponding to
the first direction designation position, for instance
the first column letter in the same row, to be displayed
5 on the display unit, causes, after determination of the
displayed row of the letter set, letters representing
columns determined by intervals of movement of the
pointer to be successively displayed on the display unit,
and outputs, upon determination of a displayed letter,
10 a signal representing the same displayed letter.

In the Japanese letter input device, the data
processing unit causes, while the pointer is
circumferentially moved in a predetermined direction
after starting movement from the reference position and
15 reaching the first direction designation position,
causes such row selection mode indication as to cause
letters representing rows of the letter set
corresponding to relayed direction designating
positions to be successively displayed on the display
20 unit, determines, when the pointer is once stopped and
then turns to be moved in the reverse direction, a row
of the letter set corresponding to the direction
designation position, which the pointer is once stopped
at, while also deciding that a row selection mode has
25 been set up and causing successive display of letters
representing rows corresponding to intervals of movement
of the pointer, decides, when the pointer is returned
to the reference position, that the prevailing displayed

row has been determined, thus outputting a signal of a letter corresponding to the determined column and row.

In the Japanese letter input device, the direction designation unit includes a determining switch for
5 informing, when the first and second direction designation positions and the combination thereof are determined while the pointer is moved, the determination to the data processing unit.

In the Japanese letter input device, the direction
10 designation unit includes a pointer mechanism having a plurality of direction designation positions uniformly spaced apart on two concentric circles, the pointer mechanism being capable of detecting each of the direction designation positions stepwise when tilted
15 from a center position in radial direction.

In the Japanese letter input unit, the direction designation unit is capable of being switched between a column input mode and a row input mode in dependence on two different tilting angles, effect column input when
20 tilted by small angle, effects row input when tilted by large angle, effects column determination when tilted to the large angle during the column selection in the small angle tilted state, effects row selection when tilted to the large angle once again, effects row
25 determination when subsequently returned to the center position, and effects input of a Japanese kana letter by combining the determined column and row.

In the Japanese letter input device, the direction

designation unit inputs a consonant of the Japanese kana letter set at the time of the column input, and inputs a vowel of the Japanese kana letter set at the time of the row input.

5 In the Japanese letter input device, the direction designation unit inputs letters in a romaji alphabet letter set at the time of the column input, and inputs the orders of the inputted letters at the time of the row input.

10 The Japanese letter input device further comprises a button or like switch for switching a letter input operation and a cursor operation of the direction designation unit over to each other.

 In the Japanese letter input device, the direction
15 designation can be switched to set up a cursor movement mode and a display scroll mode in dependence on angles of tilting it when used for the cursor operation, the cursor movement mode being set up by tilting the unit by small angle, the display scroll mode being set up by
20 tilting the unit by large angle.

 In the Japanese letter input device, when the direction designation unit is used for the cursor operation, the extent of movement of cursor is changed according to the tilting angle of the pointer for
25 inputting commands concerning the display operation

 In the Japanese letter input device, the direction designation unit includes an elastic member to let a tilting angle of the pointer be known with a feel of click.

In the Japanese letter input device, the direction designation unit has a structure that the user is given a feel of click whenever the pointer being circumferentially moved reaches a direction designation position.

Other objects and features will be clarified from the following description with reference to attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1(a) and 1(b) are a block diagram and a drawing showing direction designation points for showing an embodiment of the present invention;

Figs. 2(a) and 2(b) are output examples of the direction designation unit for binary and hexadecimal systems;

Figs. 3(a) and 3(b) are visual representation of processes of movement of the stick or direction pointer of the direction designation unit;

Figs. 4(a) and 4(b) are flow charts representing routines of the information processing unit in response to corresponding to movements of the pointer of the device;

Fig. 5 is a flow chart showing a basic input operation without use of determining key;

Fig. 6 is a flow chart showing a basic input operation with use of interruption key;

Fig. 7 is a visual representation of operation according to the present invention;

Figs. 8(a) and 8(b) are flow charts illustrating a main processing and a consonant determining process;

Fig. 9 is a visual representation of operation according to the present invention;

5 Fig. 10 is a visual representation of operation according to the present invention;

Figs. 11(a) and 11(b) are flow charts illustrating operation of the present invention without use of determination key;

10 Fig. 12 is a flow chart showing operation of the present invention with use of interruption key;

Figs. 13(a) and 13(b) are views showing successive displays on a display screen and route of changes in the direction designation point position of an operation 1
15 according to the present invention;

Figs. 14(a) and 14(b) are views showing successive displays on a display screen and route of changes in the direction designation point position of an operation 2 according to the present invention;

20 Figs. 15(a) and 15(b) are views showing successive displays on a display screen and route of changes in the direction designation point position of an operation 3 according to the present invention;

Fig. 16 shows an example of the construction of the
25 direction designation unit according to the present invention;

Figs. 17(a) and 17(b) to 19(a) to 19(d) show various examples of the direction designation unit;

Fig. 20 shows an embodiment of the device according to the present invention;

Fig. 21 is a circuit diagram showing the construction of one embodiment of the present invention;

5 Figs. 22(a) to 22(e) are perspective views of the stick-like direction designation unit in the embodiment;

Figs. 23(a) to 23(e) are perspective views of the pad-like direction designation unit in the embodiment;

10 Figs. 24(a) and 24(b) show examples of the direction designation of the output data of direction designation unit;

Figs. 25(a) and 25(b) illustrate the manner of the cursor movement obtained by the small angle tilting of the input part and the display scrolling mode set up by
15 the large angle tilting of the input part; and

Fig. 26 shows how directions for inputting Arabian numerals other than the kana letters are allotted to the numerals.

PREFERRED EMBODIMENTS OF THE INVENTION

20 Preferred embodiments of the present invention will now be described with reference to the drawings.

Figs. 1(a) and 1(b) are a block diagram showing an embodiment of the present invention and a drawing showing direction designation points.

25 Referring to Figs. 1(a) and 1(b), the illustrated embodiment of the present invention is a Japanese letter input device for a portable terminal, which comprises a direction designation unit 10 including a stick or like

pointer 11 capable of being moved from center position C0 to any of 12 circumferentially spaced-apart direction designation points C1 to C12 and outputting position data by detecting the position of the stick 11, a data
5 processing unit 20 for selecting a specific letter upon a change in the output of the direction designation unit and outputting a code of the selected letter, a memory 21 for storing processing programs to be executed by the data processing unit, and a display unit 30 for displaying
10 the letter inputted by the data processing unit and also operational instructions or the like. By moving the stick 11 the center position to any one of the direction designation points C1 to C12, the data processing unit 20 determines a consonant. By subsequently moving the
15 stick 1 circumferentially, the unit 20 selects a vowel. Then, by returning the lever 11 to the center position, a letter is determined and inputted. It is possible to provide a determining key 5 for determining consonants and vowels.

20 A letter set that is provided has M columns and N rows. Practically, $N \geq M$, although $N \leq M$ is possible. It is preferable to first designate a column and then designate a row.

A one-to-one correspondence between the direction
25 designation points of the direction designation unit and Japanese kana letter consonants is provided. When a specific direction is designated, it is shown that the corresponding consonant is selected, whereby the

consonant of the Japanese kana letter to be inputted is determined. When the circumferential position output of the direction designation unit is changed with a change in the position data output of the unit from the position,
5 at which the consonant is determined, a vowel selection mode is set up, in which a vowel is inputted. A letter in the 50-letter set is inputted as the combination of the consonant and the vowel.

In a device having a redundant space, a determining
10 key for determining a consonant and a vowel may be provided and depressed to determine a letter when a consonant and a vowel to be inputted are selected in the letter selection mode.

In a device which has no space for providing a
15 determining key, the determination of a consonant and vowel is made in the following way. A consonant is determined when a corresponding direction from the center axis of the direction designation unit is designated by the stick. A vowel is selected with a
20 subsequent circumferential movement of the stick. Then, determination of a vowel and input of a letter are done with the returning of the stick to the center position.

As shown above, in this embodiment the selection of a consonant and a vowel is made sequentially by the
25 direction designation switch, which can detect designated directions, and a Japanese kana letter is inputted as the results of selection. Thus, unlike a system using a touch panel, no writing pen need be used,

and also it is possible to reduce the space used for the device. Furthermore, unlike the case of utilizing a ten key set for the letter input, there is no need of allotting a single button switch to a plurality of letters, and
5 it is thus not necessary to input letters one by one with a ten key set.

Moreover, once a position corresponding to a consonant have been memorized, a vowel can be inputted with circumferential movement of the direction
10 designation device, thus permitting fast letter input.

The constitution of the embodiment of the present invention will now be described with reference to the drawings. Fig. 20 shows an embodiment of the device according to the present invention.

15 The illustrated embodiment is a Japanese letter input device, which comprises a display unit 2101 for displaying application instructions and also letters to be inputted, a function display unit 2102 provided within the screen of the display unit for displaying various
20 functions and states of the device, a direction designation unit 2103 for designating a direction when turned down or tilted and also causing such operations as selection of a letter to be inputted, movement of a cursor displayed on the screen and scrolling of the
25 display, a stick 2104 operable by the user for determining a direction, a determining key 2105 for determining a selected letter to be inputted and also making other determinations, a deleting key 2106 for deleting

erroneous letters at the time of the letter input, a letter/cursor selection key 2108 for switching a cursor display function and a letter input function of the direction designation unit 2103, and a small letter size
5 key 2107 for inputting small size letters.

A feature of this embodiment resides in that Japanese letters can be easily selected and determined by using a stick capable of designating two-dimensional directions or the direction designation unit 2103 which
10 is pad-like in form. The direction designation unit is adapted to show that it is in its center position when nothing is done and directly designate each direction from the center position. The unit can further circumferentially move the direction designation
15 position from any one of such positions.

Fig. 1(b) is a view showing directions to be detected by the direction designation unit and allotment of consonants to directions for inputting letters according to direction designations in this embodiment.

20 In this letter input method, only the consonants in the 50-letter set are directly designated among the 50-letter kana letter set. That is, only at least 10 different directions need be able to be designated. However, where 360 degrees is divided into 10 divisions,
25 person's intuitive direction designation, such as upward, downward, leftward and rightward, is thought to be rather difficult. For this reason, the 360 degrees is divided into 12 divisions for the direction designation. The

division into 12 divisions provides two redundant direction designation points. These two points may be allotted to other functions.

For the sake of the description of the direction designation, symbol C0 is allotted to the center position, and symbols C1 to C12 are allotted to the individual directions circumferentially spaced apart clockwise.

At position C0 the direction designation unit provides no output, i.e., the unit is in its neutral state. The positions C1 to 12 are spaced apart circumferentially clockwise. These positions are allotted to Japanese kana letter consonants as follows.

C1 to A, C12 to K, C11 to S, C10 to T, C9 to N, C8 to H, C7 to M, C6 to Y, C5 to R, and C4 to W.

This allotment is an example of Japanese kana letter consonant mapping with respect to directions, and the above positions and arrangement order of the consonants are by no means limitative. An alternative example may be

C1 to A, C2 to K, C3 to S, C4 to T, C5 to N, C6 to H, C7 to M, C8 to Y, C9 to R, and C10 to W.

For manufacturing the direction designation unit as actual hardware, some means is necessary for outputting direction data. Several direction output interfaces are conceivable, and where position contact data is digitalized for hardware simplification, the following two different methods are conceivable.

Fig. 2(a) illustrates one of the conceivable

methods. The direction designation unit is adapted to output 12-bit data representing the respective 12 different directions. The least significant bit (LSB) is allotted to C1, and the most significant bit (MSB) is allotted to C12. When a direction is selected, the corresponding bit is made to be "1". The center position C0 is represented by all "0" bits. For example, when C10 is selected, the direction designation unit outputs data of "001000000000". With C0, the output data is

10 "000000000000".

In the other conceivable method, the direction designation unit is adapted to represent the 12 different directions with 4-bit state numbers.

As shown in Fig. 2(b), the direction designation unit can output position numbers 0h to Ch representing the respective positions C0 to C12. "h" in the position numbers represent that the hexadecimal system is adopted.

15

In the case of Fig. 2(b), unlike the case of Fig. 2(a) in which at least 12 hardware lead wires are necessary, at least 4 lead wires may be sufficient, thus permitting reduction of the quantity of lead wires of an interface with a CPU or the like for reading the output.

20

On the merit side of the case of Fig. 2(a), switch contact states of the direction designation unit are directly outputted, thus dispensing with an encoder or like extra circuit.

25

The letter input device is constructed to be of an

integral structure comprising a direction input unit, a data processing unit for letter input and other processes and a display unit for displaying the result of the letter input.

5 In both the above data output methods, the data processing unit reads the data output of the direction input unit and recognizes a consonant corresponding to the read-out data as consonant data of a letter to be inputted.

10 In addition, the direction designation unit is adapted to give user a sense of mechanical click while it is circumferentially moved, thus permitting the user to sense the extent of movement when selecting a vowel.

15 The basic operation of the embodiment will now be described with reference to Figs. 1(a) and 1(b) to 3(a) and 3(b).

20 As shown in Fig. 1(a), in the direction designation unit, which serves as a position data output unit, 360 degrees around center reference point C0 is divided into 12 equal divisions to define direction designation points C1 to C12 circumferentially uniformly spaced apart clockwise. When a direction is designated, the unit can detect it and output the corresponding one of the position data C1 to C12 representing a first or a
25 second direction designation point. When the center position of the unit is designated, the unit outputs data C0. In the case of Fig. 2(b), the unit outputs representing respective positions are hexadecimal data.

The data processing unit receives the output data of the direction designation unit, and analyzes the position data to generate data for executing the letter input. On the basis of the data thus generated, the unit
5 inputs Japanese letters.

Figs. 3(a) and 3(d) are visual representation of processes of movement of the stick or direction pointer of the direction designation unit. Figs. 4(a) and 4(b) are flow charts representing routines of the information
10 processing unit in response to corresponding to movements of the pointer of the device.

In this embodiment of the letter input device, letters may be inputted with or without a determining key. These two methods are based on different letter
15 input algorithms.

The routine in the case of using the determining key will first be described with reference to Fig. 3(a).

Referring to Fig. 3(a), it is assumed that the pointer of the direction designation unit has been moved
20 from center position C0 ① along route ② to position C9 and thence successively moved circumferentially along route ③ to position C10, then along route ④ to position C11, thence long route ⑤ to position C12 and thence along route ⑥ to position C13.

25 When the user is doing nothing, i.e., with the wit the pointer at the center position ①, the direction designation unit is outputting data "0h" representing the position C0 to the data processing unit.

With subsequent movement of the pointer along route ② to the position C9, the unit outputs data "9h" of the first direction designation position. When the data processing unit reads out "9h", it causes display on the display unit that consonant "N" has been selected, and notifies the user that "Na column" has been selected. When the determining key is depressed at this time, the unit determines that the first direction designation position is allotted to the "Na row" consonant.

10 If the determining key is not depressed, the consonant selection mode remains, and the pointer is moved along route ③ to position C10. As a result, the direction designation unit outputs data "Ah". If the determining key is not depressed yet, the consonant selection still remains. At this time, the data processing unit reading "Ah", causes display on the display unit that consonant "T" has been selected, thus notifying the user that "Ta column" has been selected. With subsequent movement of the unit lever along route 15 ④ to position C11, the direction designation unit outputs data "Bh". The data processing unit thus reads out "Bh" and causes display on the display unit that consonant "Sa" has been selected, thus notifying the user that "S column" has been selected.

25 When the determining key is depressed with the pointer of the direction designation unit at the position C11, the data processing unit reads out this depression of the determining key, and determines the consonant at

the first direction designation position, i.e., "Sa row" consonant.

The row of the first direction designation position that has been determined may be displayed in various ways.

5 As an example, as shown at 1401 to 1406 in Fig. 13(a), a consonant is displayed as an alphabet letter at the time of its selection, and at the time of its determination a kana letter is displayed. Alternatively, the representation may be made in different ways when
10 a consonant is selected and when it is determined. For example, the cursor display may be changed from white conversion to cursor brink. When the row concerning the consonant of C11 is determined, it is notified by displaying letter "Sa".

15 After the determination of the first direction designation position, by moving the direction designation unit pointer along route ⑤ to the position of C12 the direction designation unit outputs data "Ch", and letter "Shi" is displayed to notify the user that
20 this letter has been selected.

By depressing the determining key with the pointer at the position C12, this position thus becomes the second direction designation position. The data processing unit reads out this depression of the determining key,
25 and determines a vowel. Thus, the unit determines letter "Si" to be inputted, and notifies the user that this letter is inputted.

It is now assumed that the pointer is moved along

route ⑥ to position C1 without determination of the first direction designation position. In this case, the data processing unit executes the same process as the first consonant selection process, and notifies the user that
5 "A row" has been selected.

By subsequently returning of the pointer along route ⑦, past position C2 and along route ⑧ to the position C0 without depression of the determining key for determining the second direction designation
10 position, the letter selection mode is released.

Figs. 4(a) and 4(b) illustrate the above operations. Specifically, Fig. 4(a) is a flow chart showing a main routine, and Fig. 4(b) is a flow chart showing in detail a step 407, namely "SELECT VOWEL CORRESPONDING TO
15 POSITION".

Referring to Fig. 4(a), when the routine is started, the direction designation unit monitors the depression of the determining key (step 402). When the determining key is depressed for the first time with the pointer at
20 the first direction designation position, the data processing unit reads out the direction of the pointer from the center position (step 403), and selects and causes conversion display of a corresponding predetermined consonant (step 404). Then, depression of
25 the determining key this time for determining the second direction designation position is monitored (step 405). When the determining key is depressed again for the second direction designation position, the data processing unit

reads out the direction of the second direction designation point at this time (step 406).

The data processing unit then determines the difference between the direction of the first direction designation position, which has been read out in the step 5 403 after the detection of the depression of the determining key for the first time, and the direction of the second direction designation position, which has been read out in the step 406 after the detection of the 10 second depression of the determining key, and selects a vowel corresponding to the determined difference (step 407).

As shown in Fig. 4(b), denoting the direction read out in the step 403 after the detection of the first depression of the determining key by Cx, when the 15 direction read out in the step 406 after the second key depression is advanced clockwise by one step from Cx (step 40701), the data processing unit selects the second row vowel "i" (step 40705). When the read-out direction is advanced clockwise by two steps (40702), the unit selects 20 the third row vowel "u" (step 40706). When the direction is advanced clockwise by three steps from Cx (step 40703), the unit selects the vowel "e" (step 40707). When the direction is advanced by four steps (step 40704), the 25 unit selects the vowel "o" (step 40708). With the selected consonant and vowel, the data processing unit determines a letter, and inputs the same to a succeeding device (step 408).

As is seen from the above routine, at the time of the depression of the determining key for the first direction designation position the data processing unit reads out the output of the direction designation unit
5 and determines a consonant, and at the time of the second depression of the determining key for the second direction designation position it reads out the direction designation unit output again and determines a vowel, thus determining a letter in the 50-letter set.
10 When the direction designation unit output is restored to C0 at any point in the routine, the routine goes back to "START" (step 401).

Now, the routine in the case when the determining key is not used will be described with reference to Fig.
15 3(b) and 5.

Referring to Fig. 3(b), it is first assumed that the output of the direction designation unit represents position C0 ①, i.e., the unit is in the initial state. This corresponds to "START" (step 501) in Fig. 5.

20 It is then assumed that the output of the direction designation unit has been changed from C0 to Cx, i.e., it is detected that the unit lever has been moved from the position C0 along radial route ② to position C11 (step 502). At the time of detection of this first change,
25 "determination of a consonant corresponding to Cx" is done (step 503).

In Fig. 3(b), C11 is allotted to "S", and this means that "Sa column" in the Japanese letter set has been

selected.

By subsequently moving the counterclockwise along circumferential route ③ to position C12, the data processing unit reads out the output data of the direction designation unit, and causes display of letter "Sa". By subsequently moving the pointer along route ④ to position of C1, letter "Si" is displayed. It will be seen that a letter which is presently selected is shown to the user. This corresponds to "SELECT VOWEL
10 CORRESPONDING TO POSITION" (step 505).

It is now assumed that the pointer has been moved circumferentially along route ⑤ to cause the direction designation unit to output data C2 and then moved along route ⑥ to cause the direction designation unit to output
15 data C0. In this case, the vowel corresponding to the position C2 before the movement of the pointer to the position C0 is selected, and letter "Su" is determined to be inputted.

In Fig. 5, the above operation is shown as a routine
20 part constituted by "HAS DIRECTION DESIGNATION UNIT OUTPUT BEEN CHANGED TO C0 ?" (step 506), "DETERMINE VOWEL CORRESPONDING TO POSITION (step 507) and "DETERMINE 50-LETTER SET LETTER FROM CONSONANT AND VOWEL" (step 508). The position in "DETERMINE VOWEL CORRESPONDING TO
25 POSITION (507) is not the center position C0 but corresponds to direction designation unit output data C2 right before the returning of the pointer to the center position C0.

In this example, the position C2 is reached by three-step clockwise movement of the pointer from the position C11, and thus vowel "u" is selected. That is, letter "Su" is inputted.

5 For the above processes, a software or hardware buffer is necessary for storing position data preceding by one step. As means for reading out the hardware device output when desired, in addition to means for reading out data by hardware poring, it is conceivable to use
10 a timer for reading data as follows.

Two different means are conceivable to read direction output unit output data by using a timer. In one of such means, the data processing unit uses an internal timer for reading out the output data at a
15 predetermined interval. In the other means, the direction designation unit uses a timer for taking out direction data at a predetermined time interval from a given time instant and is adapted to generate an interruption transmitted to the data processing unit
20 after taking out the direction data. When the data processing unit receives the interruption, it reads out the direction designation unit output to obtain the direction data.

Now, the routine in the case of determining a
25 consonant and a vowel without use of any determining key but by having resort to interruptions from the direction designation unit, will be described with reference to Fig. 6.

This routine is not based on the method using a timer as described above, but it is a means for generating interruptions according to changes in the output data of the direction designation unit.

5 Initially, the routine is at "START" (step 601), and the device is waiting for detecting an interruption from the direction designation unit.

When a make interruption from the direction designation unit is generated (step 602), the data
10 processing unit reads out the direction designation unit output (step 603), and determines a consonant corresponding to the output data position (step 604).

Referring to Fig. 3(b) for this routine, the make interruption is generated when the output of the
15 direction designation unit is changed as a result of movement of the pointer from the center position ① along radial routine ② to position C11 (step 602).

The data processing unit reads out the direction designation unit output, i.e., output data of C11, at
20 this time (step 603), and determines consonant "S" (step 604).

Subsequently, when a break interruption is generated from the direction designation unit (605), the data processing unit reads out the direction designation
25 unit output (step 606), and determines a vowel corresponding to the output data position (step 607), thus determining a letter in the 50-letter set (step 608).

The break interruption is generated from the

direction designation unit when the output thereof is restored to the position C0 from any one of the positions of C1 to C12.

In the case of Fig. 3(b), this interruption is generated when the unit lever is moved along route ⑥ leading to the center position. The direction designation unit output that is read out when the break interruption is generated, represents the position C2 immediately before route ⑥.

Subsequent "determination of vowel corresponding to position" (step 607) and "determination of a 50-letter set letter from the consonant and vowel" (step 608), are done in the same ways as in the steps 507 and 508 in Fig. 5, respectively.

Fig. 26 shows how directions for inputting Arabian numerals other than the kana letters are allotted to the numerals.

In the Figure, each direction is allotted to corresponding letters in parentheses. For example, direction designation position C1 is allotted to a set of four letters A to D. This allotment is represented by "A(BCD)" with A as typical letter. Likewise, C12 is allotted to "E(FGH)", C11 to "I(JKL)", C10 to "M(NOP)", C9 to "Q(RST)", C8 to "U(VWY)", C7 to "Y(Z01)", C6 to "2(345)", and C5 to "6(789)".

First, when a particular direction is designated, the first typical letter of the corresponding letter set is displayed on the display unit. That is, the displayed

letter represents the selected Arabian numeral letter set. For example, with the designation of C8 letter "U" is displayed on the display unit. This letter "U" may be displayed as a white conversion letter or with like
5 means to indicate that the letter prevails as selected letter.

The pointer of the direction designation unit may then be moved either forward or backward, i.e., either clockwise or counterclockwise. By moving the pointer
10 counterclockwise, other letter sets are selected afresh. By moving the pointer clockwise, letters in the first selected letter set are selected.

For example, by moving the pointer counterclockwise from the position C8 to position C7,
15 "Y" and "2" are successively displayed in the mentioned order on the display unit.

Then by moving the pointer clockwise by one step, "3" is displayed, and moving by two steps "4" is displayed. Then by returning the pointer to the center of the
20 direction designation unit, letter "4" is determined and is inputted. In the above way, Arabic numerals are inputted.

Likewise, it is possible to allot some directions to symbol sets. In this case, it may be arranged that
25 by moving the pointer from the center position in a certain direction, a symbol set is selected, and by subsequently moving the lever circumferentially a particular symbol in the symbol set may be inputted.

Direction designation positions C2 and C3 which are not allotted to any letter, may be allotted to the selection of hiragana letters, katakana letters, Arabic numerals and symbols to permit selection and

5 determination of such a letter set in the same way as letter input.

In this embodiment of the Japanese letter input device, the input state of inputted letters is displayed on the display device 2101 by operating the direction
10 designation unit 2103. It is thus possible to input letters while confirming the same.

Also, the determining key used for the letter input may also be used for determining a particular letter among a plurality of displayed letters and also selecting and
15 determining a conversion letter in kanji conversion. In the letter input in the routines as shown in Fig. 5 and 6, however, it is of course that the determining key 2105 need not be used.

Fig. 21 is a circuit diagram showing the
20 construction of one embodiment of the present invention.

The circuit of this embodiment basically comprises a data processing unit including a part for effecting the letter input and a part for selecting and determining letters to be actually inputted according to the data
25 inputted to the first-mentioned part, and a display unit for displaying the result of process in the data processing unit.

Specifically, the circuit comprises a direction

designation unit 2204 mainly used for the letter input,
a determining key 2205 for determining letters to be
inputted and also determining some functions, a small
letter key 2206 used when it is desired to input small
5 letters, a display unit 2207 for displaying the content
of the result of process in the data processing unit,
such as the letter input state, determined letters, etc.,
a CPU 2201 for processing data of the direction
designation unit, the determining key and the small
10 letter key and executing letter input programs, a memory
2202 in which process programs to be executed in the CPU
and tentative data during processes are stored, an
input/output interface 2203 for taking interface between
the CPU and the input and display parts, and a buffer
15 memory 2208 for temporarily storing output data of the
direction designation unit. The buffer memory 2208 may
be dispensed with so long as the CPU has sufficient data
processing speed when taking out data.

Fig. 16 shows an example of the construction of the
20 direction designation unit according to the present
invention.

As shown, the direction designation unit 1702
comprises a disc-like direction input part with the
periphery thereof uniformly divided into 12 equal
25 divisions and a determining key 1701 for inputting
instructions of determination. The divisions of the
direction input part are tiltable in the directions of
arrows. When any one of the divisions is tilted, a

corresponding direction is detected to provide corresponding data. This part thus can provide 12 different direction data pieces. The part, i.e., the direction designation unit, provides output data of C0 as shown in Fig. 1 when it is released from hand. Where the direction input part and the determining key 1701 of the direction designation unit 1702 are disposed in such position relation as to operate the direction input part with the thumb and effect letter determination with the index finger as shown in Fig. 16, single hand input of letters is made possible.

Figs. 17(a) and 17(b) to 19(a) to 19(d) show various examples of the direction designation unit.

The direction designation unit shown in Figs. 17(a) and 17(b) comprises a disc-like direction input part 1802 having a central determining key 1801. The direction input part 1802 is operable by depressing 12 divisions of its periphery with its center as reference. It is thus possible to designate 12 different directions.

With its center set as reference, the unit can provide only a single direction designation point by a single depressing operation. The central determining key 1801 is operable for letter determination and other determining functions in application.

The direction designation unit shown in Figs. 18(a) and 18(b) comprises a stick-like direction input part 1902, a determining key 1901 provided centrally thereof, and a support 1093 supporting the components 1901 and

1902.

The unit can designate a direction by tilting the stick-like direction input part 1092 as shown by phantom lines 1094 and 1905.

5 Fig. 18(b) is a perspective view showing that this stick-like direction designation unit can designate any one of a plurality of designation directions set by dividing 360 degrees.

10 The direction designation unit shown in Figs. 19(a) to 19(d) comprises a stick-like direction input part 2001 and a support 2002 supporting the same. The direction input part 2001 is in the form of a stick like that in the example of Figs. 18(a) and 18(b). This direction designation unit, however, can designate a direction by
15 axially depressing the stick instead of a projecting button-like determining key.

Again the unit can designate a direction by tilting the stick 2001 as shown by phantom lines 2003 and 2004.

20 As shown in Figs. 19(b) and 19(c), the unit can designate any one of a plurality of designation directions set by dividing 360 degrees.

Fig. 19(d) shows the structure of the stick 2001. This structure is basically the same as that shown in Figs. 18(a) and 18(b), and comprises a slidable operating
25 member 2008 covering a switch 2009, which has signal contacts which are turned on by depressing the operating member, and a support part 2010 supporting the operable member 2008. A lead wire leading to a contact of the

switch 2009 is passed through the support part.

The operation of the direction designation unit shown in Figs. 20 and 21 will now be described in connection with a case of sequence of inputting kana letter "Ku" by using the determining key as shown in Figs. 13(a) and 13(b).

Fig. 13(a) is a view showing successive displays on a display screen of any of the direction designation units shown in Figs. 17(a) and 17(b) to 19(a) to 9(d) with changes in the direction designation point position in the letter input operation. Fig. 13(b) is a view showing the route of changes in the direction designation point position. As shown in Fig. 13(a), Roman alphabets correspond to Japanese characters.

Referring to Fig. 13(b), when the direction input part of, for instance, the direction designation unit 2103 is at position ① of C0 so that the unit is outputting corresponding data, for instance "0h", the CPU 2201 is waiting for letter input. At this time, a previous display (1401) on the screen is held without being updated.

With subsequent movement of the direction input part of the unit along route ② to the position of C1, the direction designation unit outputs data of C11, for instance "Bh", to the CPU 2201. As a result, the CPU does consonant selection for the first time. Since "S column" is allotted by C11, letter "S" (1402) is displayed on the display unit 2101.

With subsequent movement of the direction input part along route ③ to the position of C12, the unit outputs data of C12 to the CPU. Since the determining key has not been depressed at this time, the consonant selection mode remains. Since "Ka column" is allotted by C12, letter "K" (1403) is displayed on the display unit.

With subsequent movement of the direction input part along route ④ to the position of C1, the unit outputs data of C1 to the CPU. Since the determining key again has not yet been depressed at this time, the consonant selection mode still remains. Since "A column" is allotted by C1, letter "A" (1404) is displayed on the display unit.

With subsequent movement of the direction input part from the position of C1 along route ⑤ back to the position of C12, the unit outputs data of C12. The backward movement of the direction input part is caused by erroneous skipping of the position of a consonant to be selected by the direction input part during the consonant selection. By depressing the determining key with the direction input part at the position of C12, consonant ⑤' is determined.

When the consonant ⑤' is determined, this is shown by replacing the display of letter "K" (1405) on the with Japanese kana letter "Ka" (1406) on the display unit screen. In a "hiragana" letter input state, "**kana*" indicating "hiragana" is displayed on a function display

part 2102 of the screen. In a "katakana" letter input state, "kana" indicating "katakana" is displayed on the function display part.

Since the consonant representing a column in the
5 50-letter set is determined by the position of C12, this position of C12 now constitutes a position to select vowel "a" in the first row of the 50-letter set.

It is now assumed that the direction input part is moved along routes ⑥ and ⑦ to the position of C1 and
10 thence the position of C2.

With the direction input part brought to the position of C1, letter "Ki" (1407) representing the vowel "i" of the 50-letter set second row is displayed on the display unit screen. With the direction input part
15 brought to the position of C2, letter "Ku" (1408) representing the vowel of the third row is displayed.

By depressing the determining key is depressed when the direction input part is at the position of C2, the consonant "K" and the vowel "u" are determined at a time,
20 and letter "Ku" (1409) corresponding ("K" + "u") is determined.

With returning of the direction input part from the position of C2 along route ⑧ to the position of C0, a process of inputting one letter (1410) is ended.

25 If the direction input part is returned along route ⑦ to C2 and thence along route ⑧ to C0 without second depression of the determining key, the letter input waiting state is set up again without executing the letter

determination.

The operation of the direction designation unit in the case of inputting a Japanese letter, for instance kana letter "Ne" without use of any determining key, will
5 now be described in connection with an example shown in Figs. 14(a) and 14(b).

Initially, with the direction input part of the direction designation unit at the position of C0, the output data of the unit represents C0 and is, for instance,
10 "0h". In this state, nothing is displayed on the display unit (1501).

It is now assumed that the direction input part has been moved from this position along route ② to the position of C11. In the case of Figs. 14(a) and 14(b),
15 unlike the case of Figs. 13(a) and 13(b), a consonant and a vowel are determined without use of determining key but by having resort to the sole movement of the direction input part of the direction designation unit. In this case, a consonant is selected and determined by
20 the position of Cx, to which the direction input part is first moved from C0.

That is, a consonant is selected and determined by any one of the positions of C1 to C12, to which the direction input part is first moved from C0. However,
25 if the consonant at the first position brought to is directly selected and then determined, it is impossible to correct the selected consonant in the event of erroneous consonant selection. Accordingly, it is

adapted that circumferentially clockwise movement of the direction input part causes re-determination of a consonant, while clockwise movement causes vowel selection.

5 Specifically, when the direction input part has been moved along route ② to the position of C11, letter "Sa" (1502) has already been selected. With subsequent clockwise movement of the direction input part along route ③ to the position of C10, letter "Ta" (1503) is
10 selected. With further movement of the direction input part along route ④ to the position of C9, letter "Na" (1504) is selected. At this time, by returning the direction input part to the position of C0 to restore direction designation unit output data "0h", the letter
15 "Na" is determined.

 It is now assumed that the direction input part is moved clockwise from the position of C9 along route ⑤ to the position of C10. At the time of the reversal movement from the position of C9, the consonant of "Na
20 column" of C9 is determined. With movement of the direction input part to the position of C10, letter "i" is selected as the second row vowel, and letter "Ni" (1505) is displayed on the display unit. With subsequent movement of the direction input part along route ⑥ to
25 the position of C11, letter "Nu" (1506) is displayed on the display unit. Up to this time, no letter has yet been determined.

 With further movement of the direction input part

along route ⑦ to the position of C12, letter "Ne" (1507) representing the fourth row vowel is displayed.

Now it is assumed that the direction input unit having been brought to the position of C12 is returned
5 along route ⑧ to the position of C0. With the returning of the direction input part to C0, letter "Ne" corresponding to the position immediately before the returning to C0, i.e., C12 in this case, is determined and inputted.

10 Figs. 15(a) to 15(b) show a different method of letter input without use of any determining key. This method permits consonant selection afresh when further erroneous consonant selection has been done. In the case of Figs. 14(a) and 14(b), when the data processing unit
15 reads out the direction designation unit data C0, C10 and C0 successively, it determines and inputs letter "Ta". In the operation of the case of Figs. 15(a) and 15(b), at such time it is possible to cancel the letter once selected and restore the initial letter input state to
20 permit operation afresh from the consonant selection.

Initially, the direction data input part of the direction designation unit is at the position C0 (1601). It is now assumed that the input part has been moved from this position along route ② to the position C10. At this
25 time, letter "T" (1602) is displayed on the display unit, showing that "Ta column" has been selected.

If it is found that this selection is erroneous, the input part is returned to the position C0 again

instead of further moving it circumferentially in the reverse direction. As a result, the initial display (1603) is restored. Then, by moving the input part along route ④ to position C1, letter "A" (1604) is displayed, 5 showing the "A column" has been selected.

By subsequently moving the input part along circumferential route ⑤ or ⑤' to position C2 or C12, letter "A" (i.e., kana letter "A") (1605) is displayed, showing that vowel "a" has been selected. If the input 10 part is then returned past the previous position C1 to the center position C0, the initial input state, i.e., the consonant selection mode, is restored.

Then, by moving the input part to position C1 or C12 and thence along route ⑥ or ⑥' to the next position 15 C3 or C11, letter "I" (i.e., kana letter "I") (1606) is displayed on the display unit, showing that the second row vowel "i" has been selected.

To determine the letter displayed at this time to be inputted, the input part is returned from the position 20 C1 or C11 along route ⑦ or ⑦' to the position C0. As a result, the letter allotted by the position immediately preceding the position C0, i.e., letter "I" (1607) in this case, is determined.

As shown above, although the letter input 25 operations are slightly different in the kind of the direction designation unit and the way of letter correction, in these operations a Japanese letter is inputted in such a manner that a consonant is selected

by moving the direction data input part from the center position to a circumferential position and then a vowel is inputted by further moving the input part circumferentially from that position.

5 A different embodiment of the present invention will now be described with reference to Figs. 7 and 8.

 With a direction designation unit having a determining key, the determination of a consonant and a vowel can be made by utilizing the determining key.
10 However, when it is desired to further simplify the letter input device, it is possible to dispense with the determining key and permit the letter input with the sole direction designation. This is realized by merely refraining from the use of the determining key 2105 shown
15 in Fig. 20 in the letter input.

 Figs. 8(a) and 8(b) are flow charts illustrating a letter input routine, in which the CPU reads out the output data of the direction designation unit and executes the letter input according to the read-out data.

20 The direction data input part of the direction designation unit is at position C0 in Fig. 7 when it is not touched. In this state, the input part is providing data representing the position C0. This state corresponds to "START" (step 801) in Fig. 8(a).

25 By moving the input part from this state along radial route ② to position C11, the direction designation unit outputs data representing the position C11 (for instance "Bh").

The CPU is always executing a poring process or an interval timer process to monitor movement of the direction data input part of the direction designation unit from the position C0 to any of the positions C1 to
5 C12 (step 802).

When the CPU detects movement of the input part, it executes consonant selection (step 803). In this consonant selection step, the CPU merely causes display of a consonant prevailing a selected one on the display
10 unit, and does not determine this consonant.

Then, by returning the input part of the direction designation unit to the position C0, the CPU selects vowel "a", and also determines letter "Sa" from the relation between the consonant "S" and the vowel "a". When the
15 katakana input mode is set, katakana letter "Sa" is determined.

In the above routine, the determination of the consonant (step 805) and the determination of vowel "a" (step 806) are executed as a result of detecting the
20 returning of the input part to the position C0 (step 804).

In the case of Fig. 7(a), however, the input part is moved along route ③ to position C10. That is, the input part has been moved circumferentially counterclockwise from direction designation unit output
25 data position Cx (step 802). In this case, the routine goes back to the consonant selection mode (step 803), and then the same check as described above is done. When it is detected that the input part has been moved along

route ④ and then route ⑤ to the position C10, the CPU selects vowel "i" (step 809).

By further moving the input part from the position C10 along route ⑥ to position C11, the CPU executes the
5 vowel selection again; this time it selects "u". By still further moving the input part along route ⑦ to position C12, the CPU further executes the vowel selection; this time it selects "e".

Then, by returning the input part along route ⑧
10 to the position C0 (step 810), the CPU determines the vowel corresponding to the immediately preceding position, i.e., the position C12 (step 811), and determines letter "Ne" by combining the consonant "N" and the vowel "e" (step 813).

15 Fig. 8(b) illustrates the step 809 of selecting a vowel corresponding to the input part position.

In this step, the CPU selects a vowel corresponding to the direction designation unit output data position, which the input part has been moved to from the consonant
20 determination position.

Specifically, when the direction data input part of the direction designation unit has been moved from the position C0 to position Cx and then returned to the position C0, the CPU selects vowel "a". By moving the
25 input part clockwise from the position Cx by one step (step 80901), the CPU selects "i" (step 80905). Moving the input part by two steps (step 80902) causes selection of "u" (step 80906). Moving the input part by three steps

(step 80903) causes selection of "e" (step 80907).

Moving the input part by four steps (step 80904) causes selection of "o" (step 80908).

As shown above, the CPU selects a consonant and a
5 vowel and inputs a Japanese letter according to changes
in the direction designation unit output data position.
A different letter input method again without use of the
determining key will now be described with reference to
Fig. 9 to 11(a) and 11(B).

10 This method permits consonant selection afresh,
and Figs. 11(a) and 11(b) are flow charts illustrating
the relevant routine. In this method, the re-selection
of a consonant is possible when vowel selection mode has
not yet been set up.

15 The initial state corresponds to "START" (step
1101) in Fig. 11(a). This means that the direction data
input part of the direction designation unit is at
position C0 in Fig. 9.

By moving the input past from the position C0 to
20 position Cx (1102), the CPU selects a consonant
corresponding to that position (step 1103). Assuming x
in Cx to be x = 10 in Fig. 9, this means that the CPU
selects the column of consonant "T" corresponding to the
position C10, which the input part is moved to from the
25 position C0 along route ②.

Then, if it is detected that the input device has
been returned from the position Cx to the center position
C0 directly, i.e., along route ③ and without passing any

other position C_n ($n \neq x$, $n \neq 0$) other than the center position and its own prevailing position (step 1104), the routine goes back to the step 1102, and consonant selection is executed once again.

5 However, if it is detected that the input part has been moved from the position C_x to a different circumferential position C_n ($n \neq x$, $n \neq 0$) (step 1105), the CPU selects a vowel corresponding to the position C_n (step 1106).

10 In the example of Fig. 9, the input part of the direction designation unit is moved from the center position C_0 along route ④ to position C_1 , and thence routes ⑤ and ⑥ to position C_3 . In this case, "A column" of the prevailing consonant is determined to show letter
15 "I" in the display unit, and the "i" vowel row for that column is selected.

By subsequently returning the input part along route ⑦ to the position C_0 , the direction designation unit outputs data "0h" representing the position C_0 (step
20 1108), and the CPU executes vowel determination, and determines a 50-letter set letter from the determined vowel and consonant (step 1109).

In the routine shown in Figs 11(a) and 11(b), the first selected consonant is not replaced in dependence
25 on the direction of movement of the unit part. That is, circumferential movement of the input part after the consonant selection immediately causes vowel selection. As shown in Fig. 11(b), a vowel is selected in

correspondence to the number of steps of movement from the consonant determination position. In the example of Fig. 9, it is thus possible, after the selection of the consonant "A" corresponding to the position C1, to input
5 the same letter along routes ⑤' and ⑥' as the letter that is inputted by movement along the routes ⑤ and ⑥.

Fig. 10 shows an example of selection of vowels in correspondence to steps of movement.

Referring to the Figure, after selection of
10 consonant "S" by moving the input part from the position C0 to position C11, by moving the input part three steps, i.e., to successive positions C12, C1 and C2 or C10, C9 and C8, and then back to the position C0, the CPU inputs letter "Su". Likewise, after selection of consonant "R"
15 by moving the input part from the position C0 to position C5, by moving the input part two steps, i.e., to successive positions C6 and C7 or C4 and C3, and then back to the position, the CPU inputs letter "Ri".

Fig. 12 illustrates a further routine example, in
20 which the determination of a consonant and a vowel is further simplified by using the determining key.

This routine is effective when it is applied to a single-hand operable device such as shown in Fig. 16, in which direction inputted with the thumb and a letter
25 is determined with the index finger.

Initially, i.e., at "START" (step 1201), the direction data input part 1702 is at the position C0. The CPU is always executing poring process to monitor

the output data of the direction designation unit. When the direction designation unit outputs data representing a position other than C0, the CPU shows the selected consonant by showing the same on the display unit (step 5 1203).

Upon depression of the determining key 1701 the CPU generates a make interruption. Upon releasing of the key 1701, the CPU generates a break interruption.

When the CPU receives the make interruption (step 10 1204), it determines a consonant (step 1205).

Thereafter, the CPU reads out the direction designation unit output data (step 1206), and selects a vowel corresponding to the output data position.

When the break interruption is generated by the 15 releasing of the determining key, the CPU determines a vowel (step 1209), and determines a Japanese letter from the determined consonant and vowel (step 1210).

Further letter input methods using direction designation units like those described above will be 20 described hereinunder.

Figs. 22(a) and 22(b) are a perspective view and a side view, respectively, illustrating the structure and the operation of an example of the direction designation unit in the embodiment.

25 As shown in the Figures, the direction designation unit has a stick 2301, which can be depressed in two steps. The device can output two different kinds of signals corresponding to respective tilting angles. The stick

may be adapted to be tilted by desired angles in the two successive steps. The difference between the two tilting angles may be clearly known by setting one of the two angles to about one half of the other angle. For
5 example, where the large tilting angle is set to 60 degrees, the small one may be set to about 30 degrees.

Fig. 22(c) shows an alternative to the above example. In this case, a ring-like member 2303 made of rubber or like elastic material is provided such that
10 it surrounds the stick 2301. As shown in Fig. 22(d), by lightly tilting the stick, a resistance is felt when the stick is brought into contact with the ring-like member. As shown in Fig. 22(e), by further tilting the stick with an increased force, the ring-like member is deformed to
15 give a feel of click.

Figs. 23(a) and 23(b) show a further example of the direction designation unit. This unit has a pad-like structure, and designates directions when its peripheral portions are depressed. Specifically, as shown in Fig.
20 23(a), the device comprises a disc-like base 2405 having a plurality of uniformly circumferentially spaced-apart switches 2402, which are provided on the top surface of the base and each have a pair of wired contacts 2403 and 2404 spaced apart in the radial direction. The switches
25 2402 are closed by pushing them from above with conductive members 2406. In this unit, a designated direction is detected by confirming electric connection of the corresponding one of the switches.

The conductive members are preferably made of conductive rubber or like material, but they may be made of any other material as well so long as they can be brought into close contact with the switch contacts and
5 turn on the switches when pushed thereagainst.

Figs. 23(c) to 23(e) show a modification of the example shown in Figs. 23(a) and 23(b). This unit has conductive pieces in the form of protuberances to be brought into contact with switch contacts. Specifically,
10 as shown in Fig. 23(c), the device comprises a disc-like pad 2407, outer conductive pieces 2408, inner conductive pierces 2409, outer contacts 2410 and inner contacts 2411. The conductive pieces are merely applied by adhesive or the like to the pad, and do not have any
15 contact.

The outer and inner conductive pieces have different lengths or depending dimensions, the outer conductive pieces having slightly greater dimensions. This arrangement is adopted such that, as shown in Fig.
20 23(d), by slightly tilting the pad in a certain direction the corresponding outer conductive piece is connected to the associated outer contact and, as shown in Fig. 23(e), by further tilting the pad the corresponding inner conductive piece is connected to the associated inner
25 contact.

In the unit shown in Fig. 23(a), the contacts may be formed with central notches extending perpendicular to residual directions. With this arrangement, the

switches are electrically connected when the conductive members are sufficiently connected to the corresponding contacts.

Fig. 23(f) shows a different modification of the example shown in Figs. 23(a) and 23(b). In this unit, elongate sheet-like conductive pieces are applied in a warped fashion to a pad. Specifically, the unit comprises a pad 2412, conductive pieces 2413, outer contacts 2414 and inner pieces 2415.

Each of the conductive pieces may each be applied such that its crown of warp is found right above the associated inner contact. As shown in Fig. 23(f), by so doing, slight tilting of the pad causes connection of the contact piece to the inner contact, and further tilting of the pad causes connection of the conductive piece to the outer contact.

Figs. 24(a) and 24(b) show examples of the direction designation of the output data of direction designation unit, which can provide two different kinds of output data corresponding to respective tilting angles.

In the example of Fig. 24(a), the unit output data consists of 12 bits allotted to respective directions and each being inverted to "1" when the corresponding direction is designated and a further bit allotted to for the tilting angle discrimination. The most significant bit is "0" when the tilting angle is small, and is "1" when the angle is large.

In the example of Fig. 24(b), in order to reduce the number of hardware lead wires the position number allotment is made by encoding the directions to be designated, and the unit output data consists of 5 bits
5 for both the direction designation and the tilting angle discrimination.

In this example, the most significant bit is allotted to the tilting angle discrimination. Like the example of Fig. 24(b), the most significant bit is "0"
10 when the tilting angle is small, and is "1" when the angle is large.

With the above direction designation units, the letter input may be done in the following way. By first tilting the direction data input part lightly and
15 slightly in a direction to be designated, the consonant selection mode is set up for selecting a consonant to be determined. When a consonant to be determined has been selected, the input part is further tilted with increased force to determine the consonant and also set
20 up the vowel selection mode for selecting a vowel.

The consonant selection mode can be set up again by returning the input part to the center position instead of switching it by further depressing the input part with increased force. The same way of direction allotment to
25 the consonants is preset as in the case described before in connection with Fig. 1.

Specifically, as for the vowel selection the first row vowel "a" is determined by returning the direction

data input part to the center position instead of
circumferentially moving the input part from the
consonant determination position, the second row vowel
"i" is determined by circumferential one-step movement
5 of the input part from the consonant determination
position in either direction, the vowel "u" is determined
by further one-step movement, the vowel "e" is determined
by still further one-step movement, and the vowel "o"
is determined by yet further one-step movement. It is
10 adapted that the same results can be obtained by
circumferential movement in either direction, i.e.,
either clockwise or counterclockwise.

When a consonant to be determined is selected, it
can be determined by releasing the direction data input
15 part, i.e., returning the input part to the center
position, with subsequent need of doing nothing. In the
event when the direction designation unit is erroneously
brought to the small angle tilted state during the vowel
election mode with the unit in the large angle tilted
20 state, continual vowel selection may be made by bringing
about the large angle tilted state again. When a
consonant and a vowel are determined, a Japanese letter
is determined from these data.

It is thus possible to replace the determining key
25 with the two-step tilting of the direction data input
part for independently inputting a consonant and a vowel.

It is further possible to provide the role of a row
renewal key, which is frequently operated in sentence

input, by providing such a direction designation unit structure as to permit a depression output to be obtained by depression with such a feel as to depress a button while the unit is at the center position. Such a
5 structure easily permits inputting Japanese letters and making row renewal at the end of a paragraph.

Furthermore, with a direction designation unit which can detect tilting angle in two steps, it is readily possible to switch the cursor movement, which is thought
10 to be a function frequently used in this type of portable terminal, and the scrolling of the display.

For example, it is possible to permit the cursor movement to be obtained by small angle tilting of the direction data input part and the switching of the mode
15 over to a high speed display scrolling mode by large angle tilting of the input part.

Fig. 25(a) illustrates the manner of the cursor movement obtained by the small angle tilting of the input part, and Fig. 25(b) illustrates the display scrolling
20 mode set up by the large angle tilting of the input part.

As has been described in the foregoing, according to the present invention a letter set is formed by arranging desired letters and symbols in a matrix array of M columns and N rows, and it is made possible to
25 designate coordinates of the columns and rows of letters with a stick or like coordinate data input means. Thus, when the present invention is applied to a Japanese letter input device for a portable terminal, it is possible to

obtain an effect of permitting letters, particularly Japanese kana letters, to be easily inputted with less necessary space.

In addition, Japanese kana letters are inputted by
5 disassembling them into consonants and vowels. Thus, the user need only preliminarily memorize 10 different direction positions allotted to the consonants and five different intervals covered by movement from a consonant determination position for the selection of the vowels.
10 The user becoming familiar with the device thus input letters intuitively, that is, it is possible to input letters intuitively without particular reference to the display.

Furthermore, where a direction designation unit
15 capable of detecting directions is used for the letter selection, neither a letter writing pen as in the touch panel system nor reference to a ten key set in the letter selection as in the ten key system is necessary.

Still further, where a button switch is used for
20 determining a letter by depressing it, the selection and determination of a letter can be easily done with a single hand.

Where no such button switch is used, it is possible to further reduce the necessary space of the letter input
25 device.

Moreover, where directions of tilting of a direction designation unit are allotted to consonants in a letter set, it is possible to permit selection of

a consonant by moving the unit. Also, where intervals of movement are allotted to vowels, it is possible to permit input of a Japanese letter as a combination of a consonant and a vowel by merely changing the direction designation position of the direction designation unit.
5 With these arrangements, it is thus possible to realize the letter input with a single hand or a single finger.

Changes in construction will occur to those skilled in the art and various apparently different
10 modifications and embodiments may be made without departing from the scope of the present invention. The matter set forth in the foregoing description and accompanying drawings is offered by way of illustration only. It is therefore intended that the foregoing
15 description be regarded as illustrative rather than limiting.

What is claimed is:

1. A Japanese letter input method of inputting letters in a letter set used in a Japanese letter input device, the method comprising the steps of:

prearranging predetermined letters and symbols in a matrix array of M columns and N rows; and

inputting any desired letter or symbol by designating corresponding column and row coordinates in a predetermined order with a position input means.

2. The Japanese letter input method according to claim 1, wherein the letter set is obtained by arranging kana letters in the 50-letter set in a matrix array of columns and rows, the columns each consisting of letters assigned by the same consonant, the rows each consisting of letters of the same vowel, the symbols including the consonant mark and the p-sound mark.

3. The Japanese letter input method according to claim 1, wherein the letter set is formed by arranging romaji alphabet letters, numerals and symbols in columns and rows.

4. A Japanese letter input device for a portable terminal comprising:

a direction designation unit having a plurality of (i.e., m) direction designation positions uniformly spaced apart in a circle with the consonant at a reference

position and having a predetermined radius, the direction designation unit including a pointer capable of being moved from the reference position radially in a two-dimensional plane and then circumferentially and then returned to the reference position, the direction designation unit being capable of detecting a first direction designation position, which the pointer is first radially moved to, and a second direction designation position, which the pointer is located at before being moved circumferentially and then returned to the reference position, and outputting position data of the detected direction designation position;

a data processing unit for generating letter codes from the position data outputted from the direction designation unit by using a memory means with a letter set stored therein; and

a display unit displaying the letter codes generated at the data processing unit.

5. The Japanese letter input device for a portable terminal according to claim 4, which further comprises a buffer for temporarily storing input data of the direction designation unit.

6. The Japanese letter input device for a portable terminal according to claim 4, in which a plurality of letter sets are stored, and which further comprises a means for selecting each of the letter sets.

7. The Japanese letter input device for a portable terminal according to claim 6, wherein one of the letter sets is in the form of an M-column N-row matrix array obtained by arranging kana letters in the 50-letter set in a matrix array of columns and rows, the columns each consisting of letters assigned by the same consonant, the rows consisting of letters of the same level, and symbols including the consonant mark and the p-sound mark, direction designation positions being each allotted to each row of the letter set.

8. The Japanese letter input device for a portable terminal according to claim 6, wherein one of the letter sets is obtained by arranging romaji alphabet letters, numerals and symbols in M columns and N rows.

9. The Japanese letter input device for a portable terminal according to claim 4, wherein the data processing unit selects a row of the letter set corresponding to the first direction designating position represented by the position data outputted from the direction designation unit.

10. The Japanese letter input device for a portable terminal according to claim 9, wherein the data processing unit detects, upon reception of the position data representing the second direction designation position

from the direction designation unit, an interval of circumferential movement of the pointer from the difference between this position data and the previously received position data representing the first direction designation position, selects a row of the letter set, and outputs, upon reception of a determination signal, a code of a particular letter or symbol in the letter set by combining the selected column and row of the letter set.

11. The Japanese letter input device for a portable terminal according to claim 10, wherein the direction designation unit continuously outputs position data during movement of the pointer, and the data processing unit causes, upon reception of the position data of the first direction designation position, a code representing a row of the letter set corresponding to the first direction designation position, for instance the first column letter in the same row, to be displayed on the display unit, causes, after determination of the displayed row of the letter set, letters representing columns determined by intervals of movement of the pointer to be successively displayed on the display unit, and outputs, upon determination of a displayed letter, a signal representing the same displayed letter.

12. The Japanese letter input device according to claim 4, wherein the data processing unit causes, while the pointer is circumferentially moved in a predetermined

direction after starting movement from the reference position and reaching the first direction designation position, causes such row selection mode indication as to cause letters representing rows of the letter set corresponding to relayed direction designating positions to be successively displayed on the display unit, determines, when the pointer is once stopped and then turns to be moved in the reverse direction, a row of the letter set corresponding to the direction designation position, which the pointer is once stopped at, while also deciding that a row selection mode has been set up and causing successive display of letters representing rows corresponding to intervals of movement of the pointer, decides, when the pointer is returned to the reference position, that the prevailing displayed row has been determined, thus outputting a signal of a letter corresponding to the determined column and row.

13. The Japanese letter input device for a portable terminal according to claim 4, wherein the direction designation unit includes a determining switch for informing, when the first and second direction designation positions and the combination thereof are determined while the pointer is moved, the determination to the data processing unit.

14. The Japanese letter input device for a portable terminal according to claim 4, wherein the direction

designation unit includes a pointer mechanism having a plurality of direction designation positions uniformly spaced apart on two concentric circles, the pointer mechanism being capable of detecting each of the direction designation positions stepwise when tilted from a center position in radial direction.

15. The Japanese letter input unit for a portable terminal according to claim 14, wherein the direction designation unit is capable of being switched between a column input mode and a row input mode in dependence on two different tilting angles, effect column input when tilted by small angle, effects row input when tilted by large angle, effects column determination when tilted to the large angle during the column selection in the small angle tilted state, effects row selection when tilted to the large angle once again, effects row determination when subsequently returned to the center position, and effects input of a Japanese kana letter by combining the determined column and row.

16. The Japanese letter input device according to claim 15, wherein the direction designation unit inputs a consonant of the Japanese kana letter set at the time of the column input, and inputs a vowel of the Japanese kana letter set at the time of the row input.

17. The Japanese letter input device according to

claim 15, wherein the direction designation unit inputs letters in a romaji alphabet letter set at the time of the column input, and inputs the orders of the inputted letters at the time of the row input.

18. The Japanese letter input device for a portable terminal according to claim 4, which further comprises a button or like switch for switching a letter input operation and a cursor operation of the direction designation unit over to each other.

19. The Japanese letter input device for a portable operation according to claim 18, wherein the direction designation can be switched to set up a cursor movement mode and a display scroll mode in dependence on angles of tilting it when used for the cursor operation, the cursor movement mode being set up by tilting the unit by small angle, the display scroll mode being set up by tilting the unit by large angle.

20. The Japanese letter input device for a portable terminal according to claim 19, wherein when the direction designation unit is used for the cursor operation, the extent of movement of cursor is changed according to the tilting angle of the pointer for inputting commands concerning the display operation

21. The Japanese letter input device for a portable

terminal according to claim 15, wherein the direction designation unit includes an elastic member to let a tilting angle of the pointer be known with a feel of click.

22. The Japanese letter input device according to claim 21, wherein the direction designation unit has a structure that the user is given a feel of click whenever the pointer being circumferentially moved reaches a direction designation position.

ABSTRACT OF THE DISCLOSURE

A Japanese letter input device is disclosed.
comprises A direction designation unit 10 includes a
stick or pointer 11 movable from center position C0 to
5 any one of 12 circumferentially spaced-apart direction
designation positions C1 to C12. Direction
designation unit is capable of outputting position data
upon detection of a position reached by the pointer 11.
A data processing unit 20 selects a particular letter
10 and outputs a code thereof according to a change in the
output of the direction designation unit. A memory 21
stores process programs to be executed by the data
processing unit. A display unit 30 displays letters
outputted by the data processing unit and also other
15 displays concerning the operations of the device. The
data processing unit 20 determines a consonant when the
pointer 11 is moved from the center position C0 to one
of the direction designation positions C1 to C12,
selects a vowel when the pointer is then
20 circumferentially moved, and determines and inputs a
letter when the pointer is then returned to the center
position C0. A determining key 5 may be provided for
determining a consonant and a vowel.

FIG.1

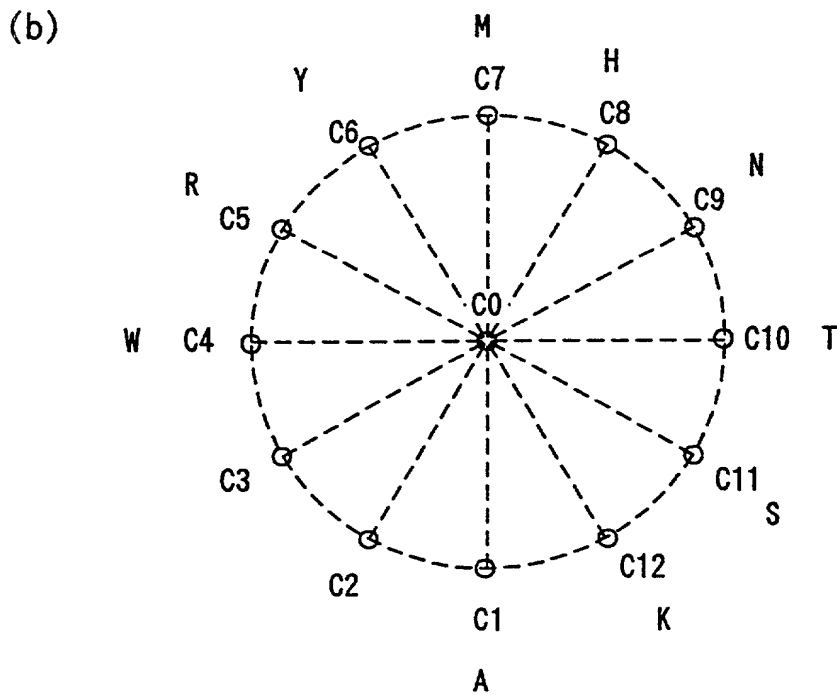
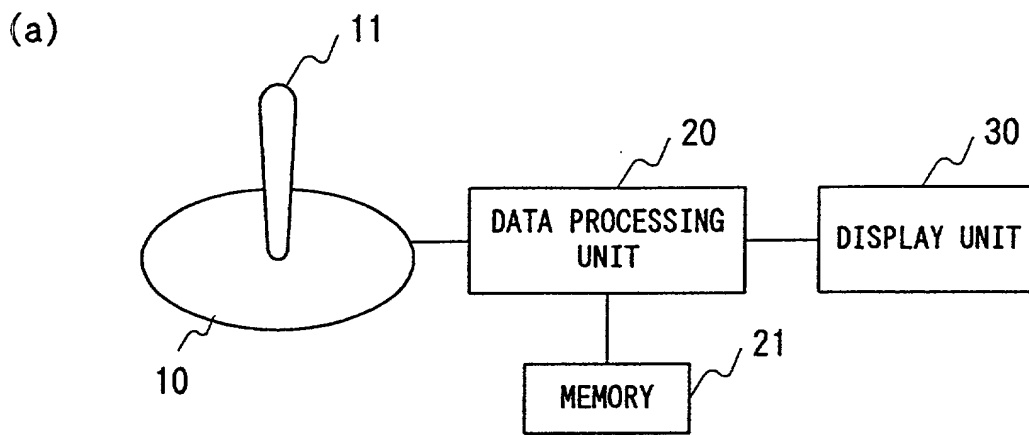


FIG.2

(a)


STATE	OUTPUT(BINARY)
C0	000000000000
C1	000000000001
C2	000000000010
C3	000000000100
C4	000000001000
C5	000000010000
C6	000000100000
C7	000001000000
C8	000010000000
C9	000100000000
C10	001000000000
C11	010000000000
C12	100000000000

(b)

STATE	OUTPUT (HEXADECIMAL)
C0	0h
C1	1h
C2	2h
C3	3h
C4	4h
C5	5h
C6	6h
C7	7h
C8	8h
C9	9h
C10	Ah
C11	Bh
C12	Ch

FIG.3

(a)

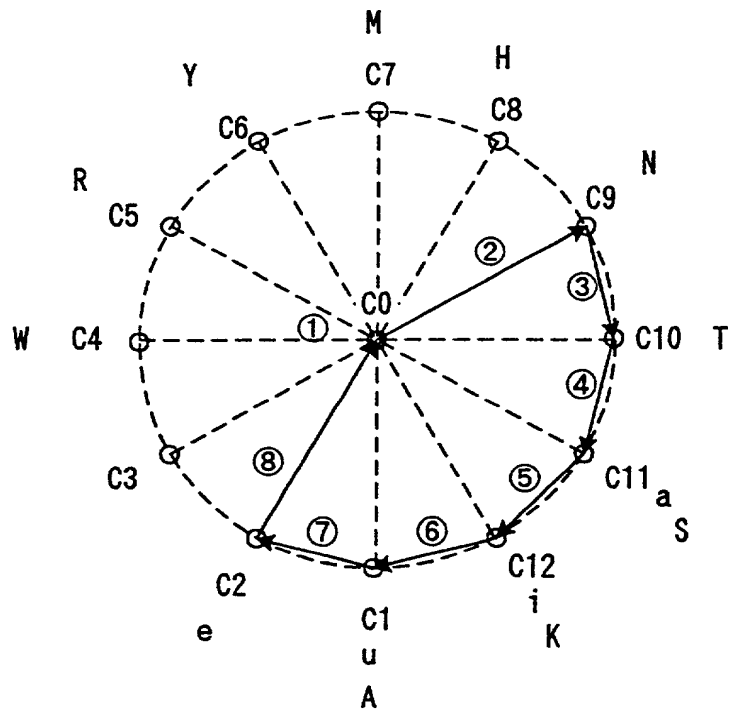

(b)

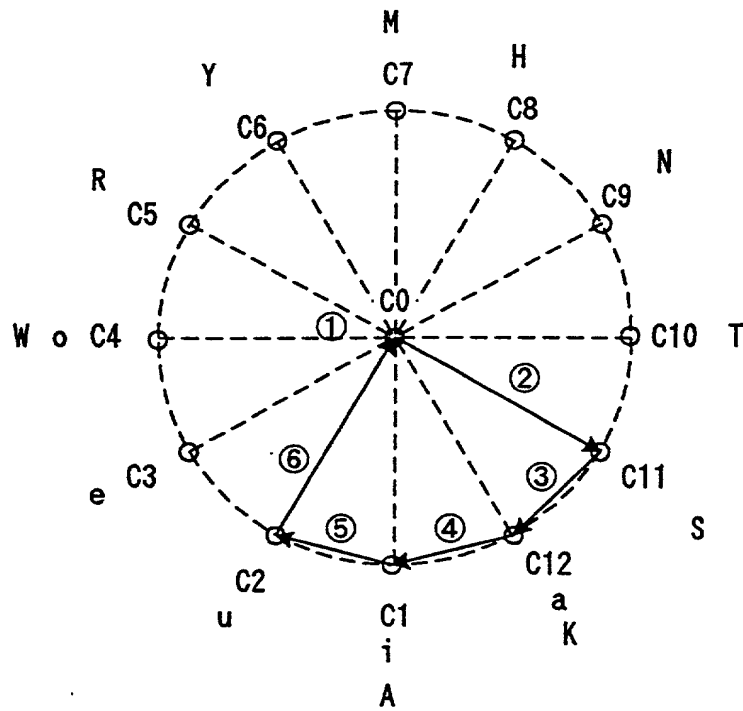


FIG.4 (a)

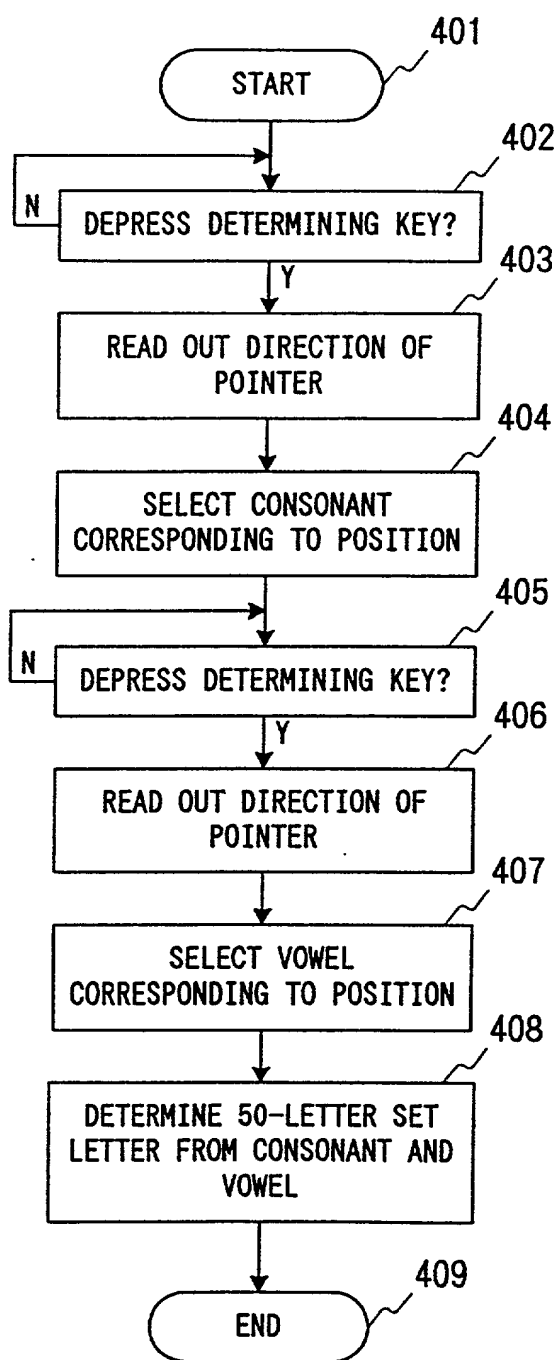


FIG.4 (b)

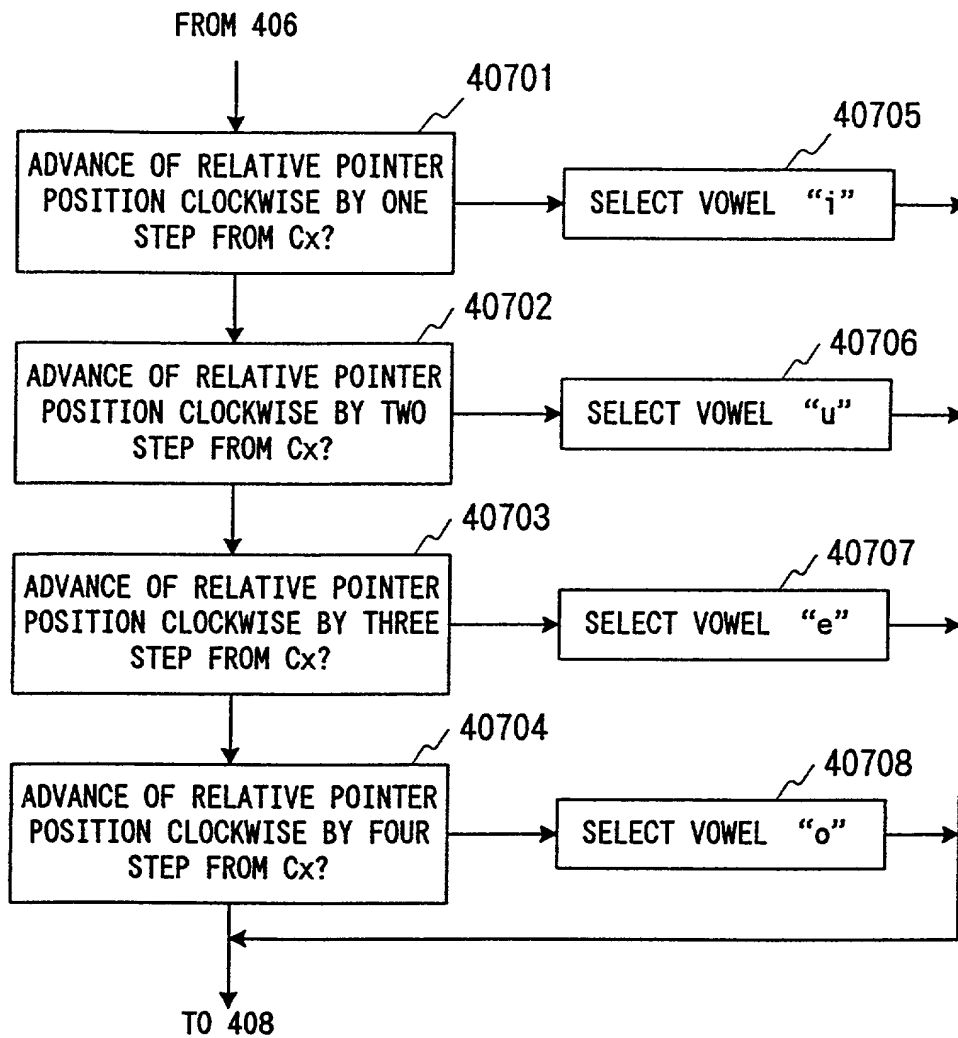


FIG.5

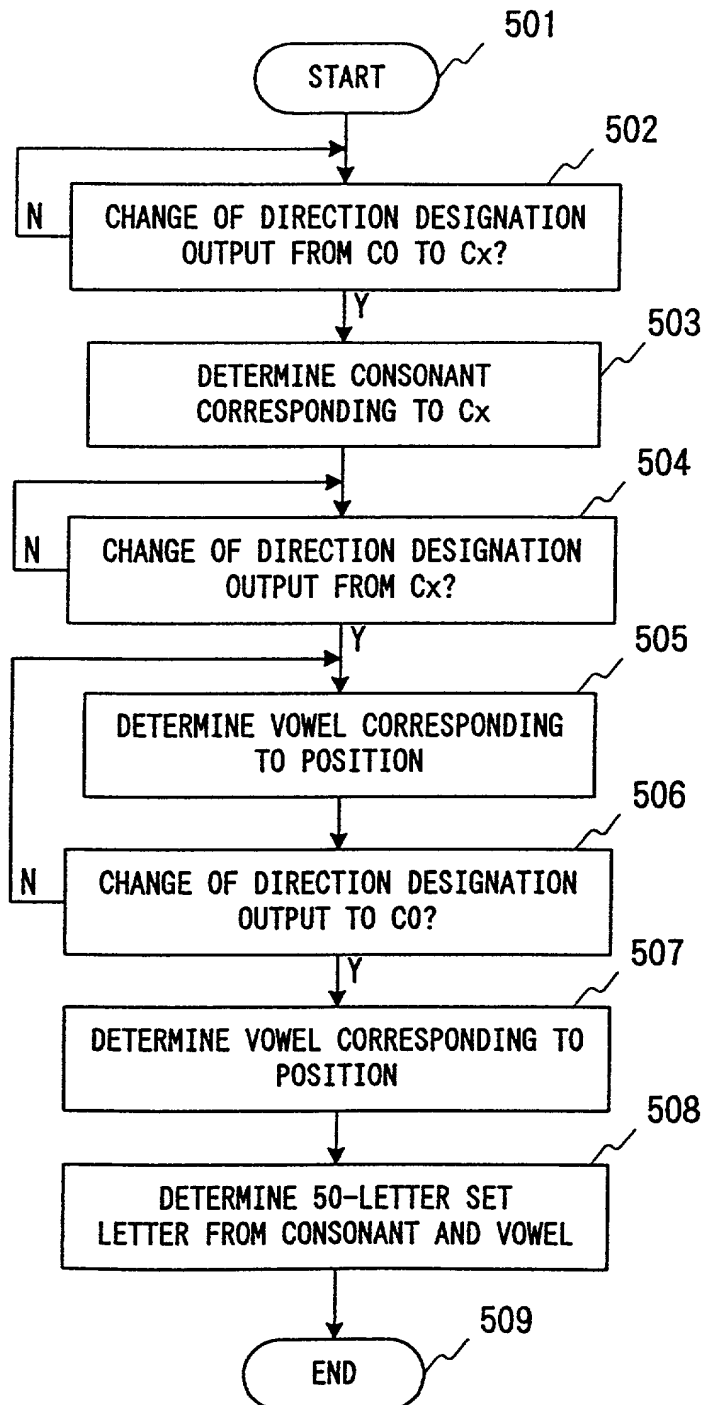


FIG.6

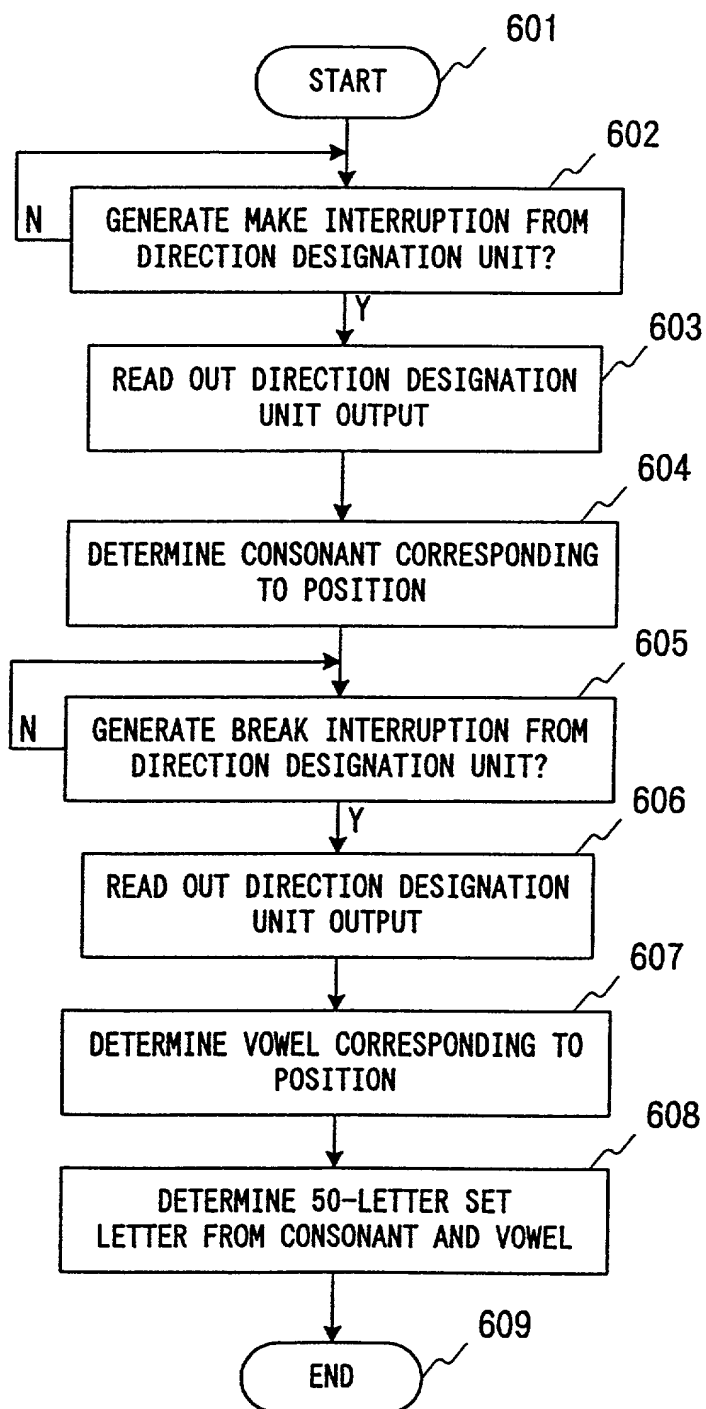


FIG.7

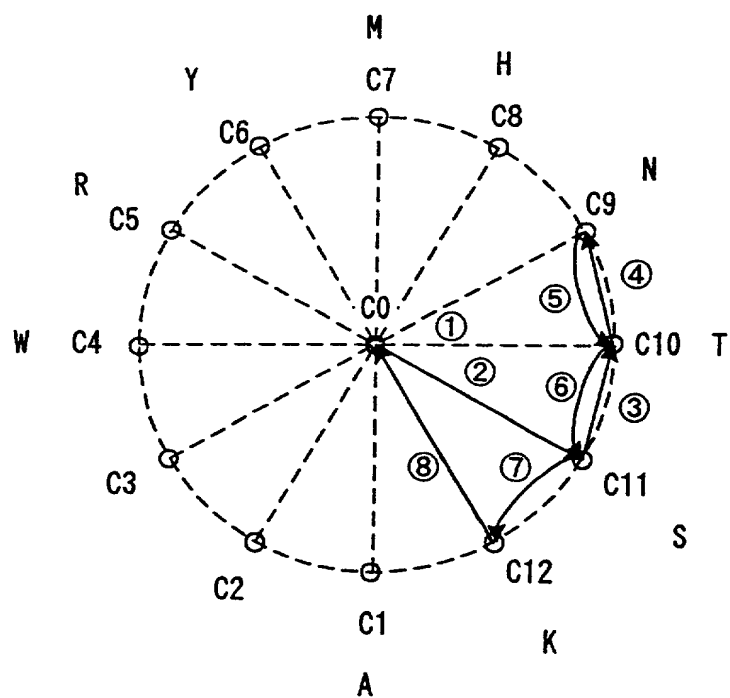


FIG.8 (a)

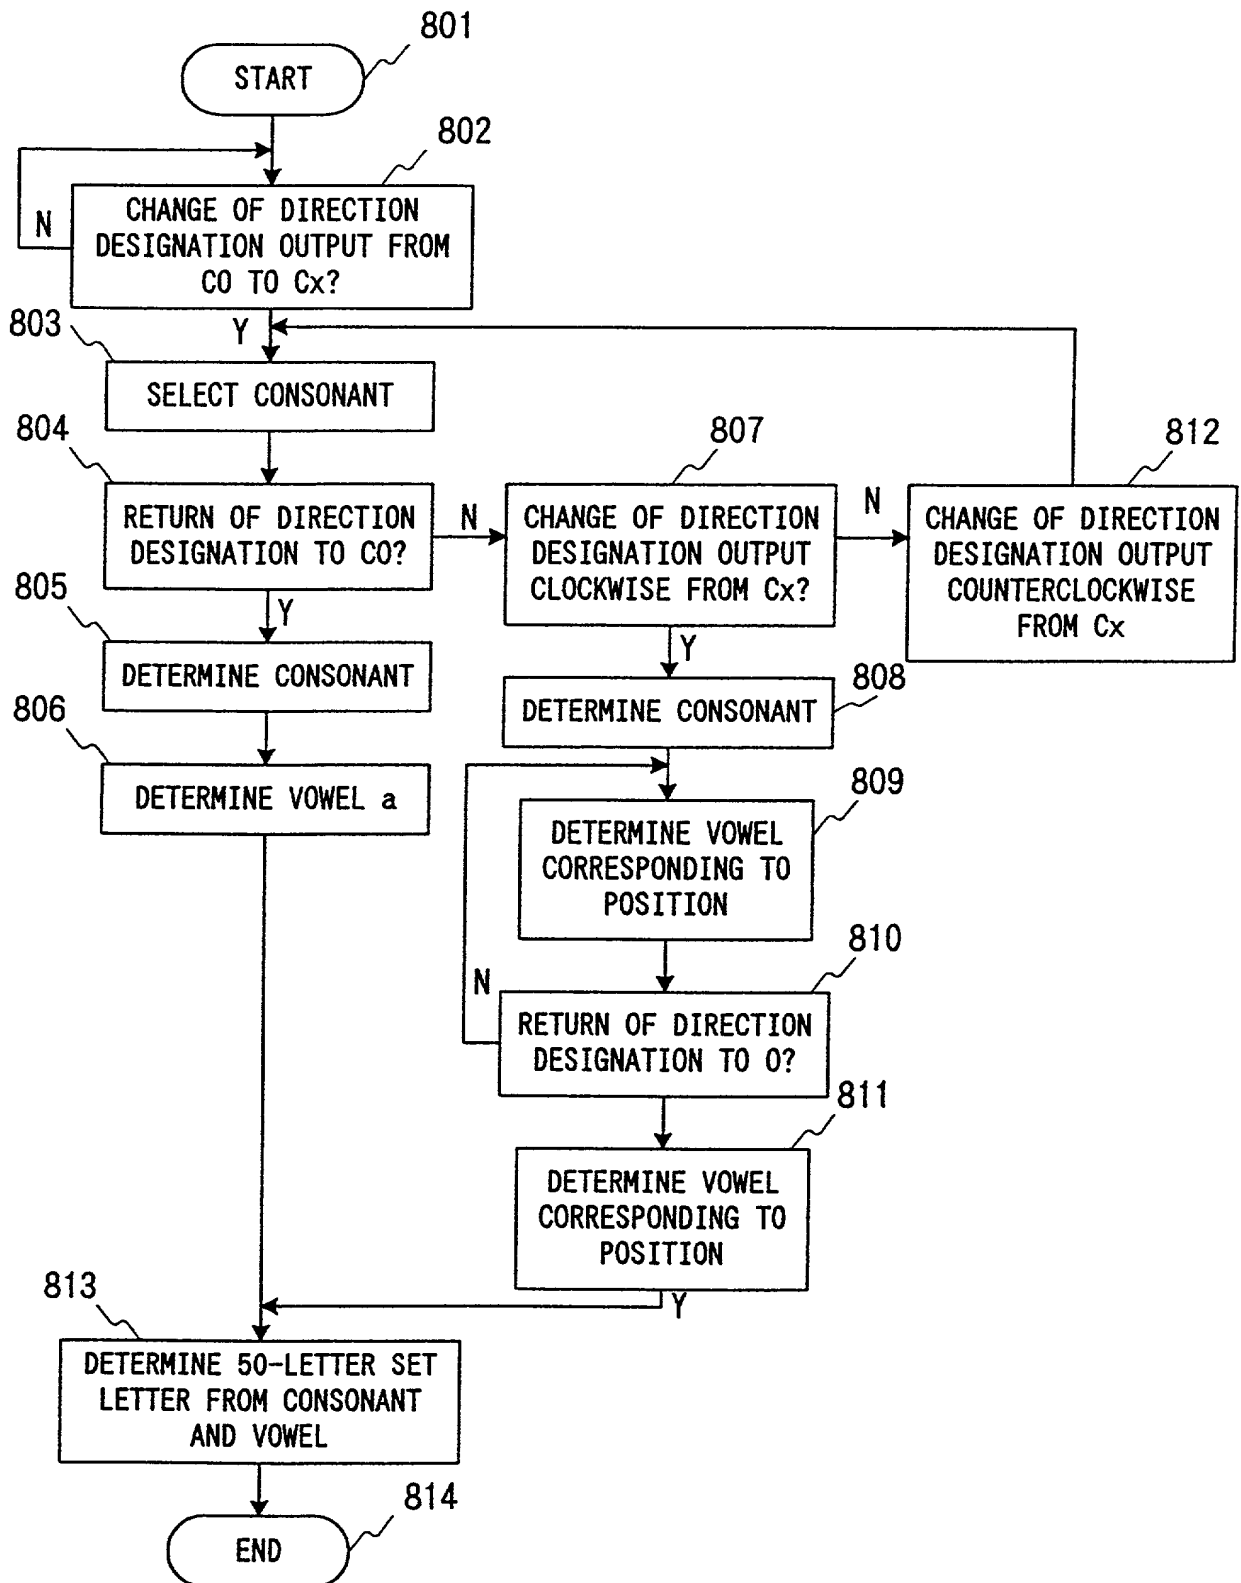


FIG.8 (b)

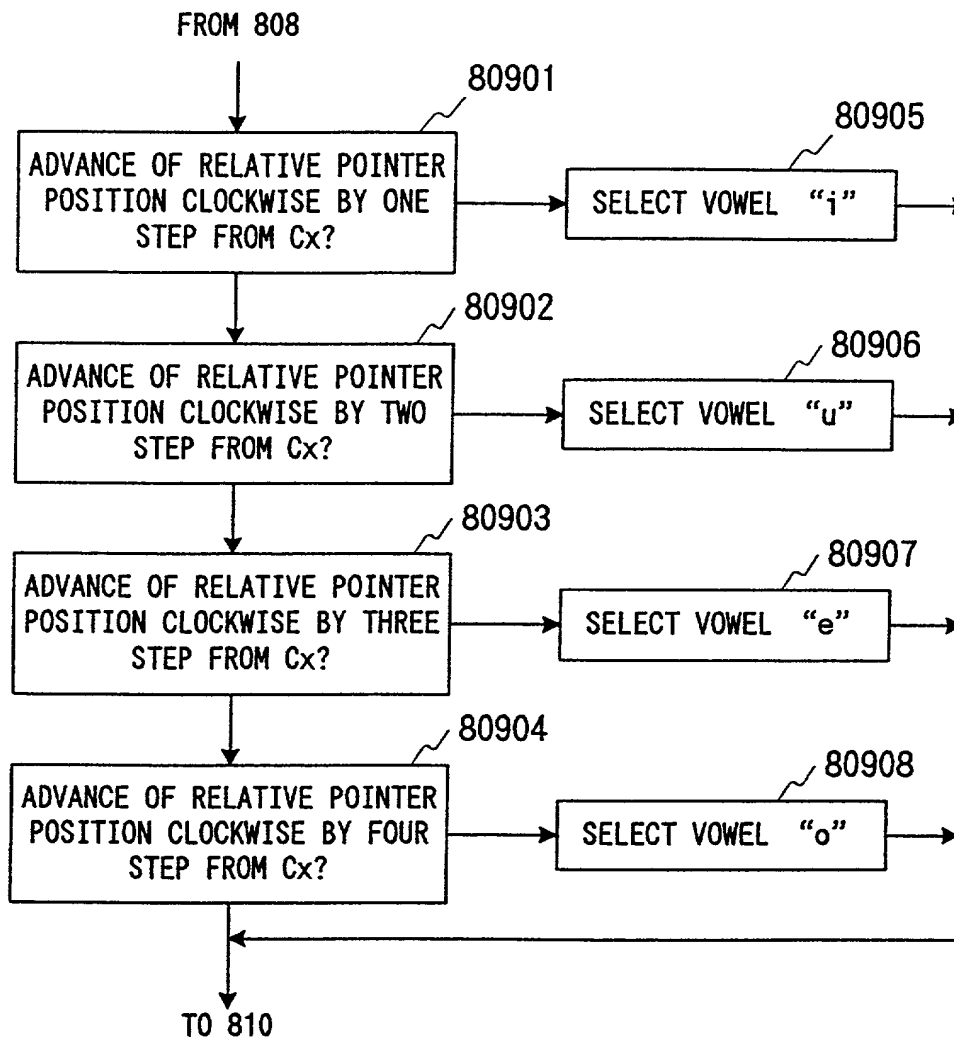


FIG.9

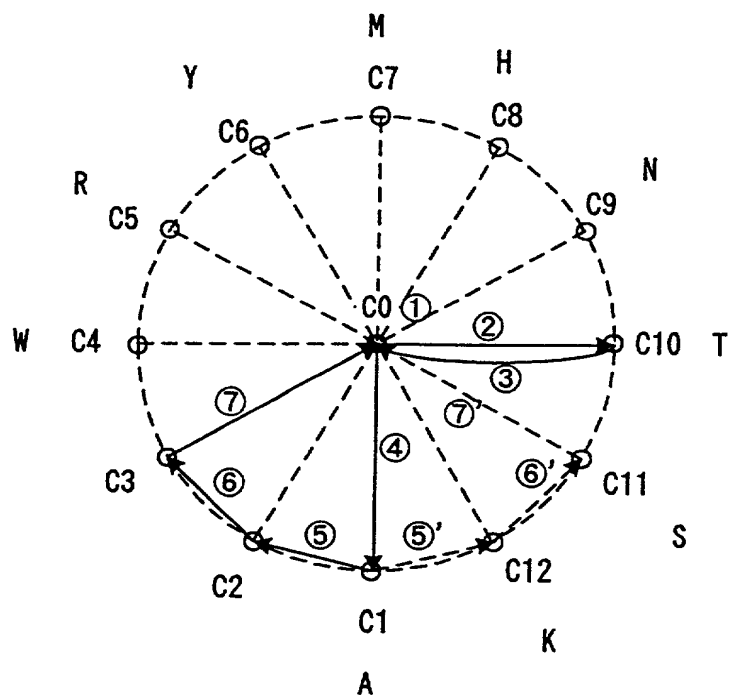


FIG.10

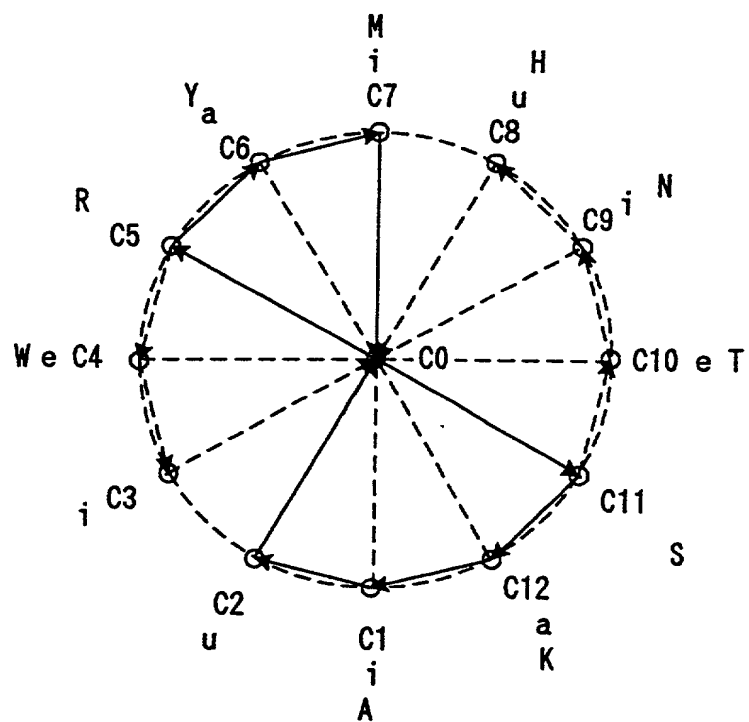


FIG.11(a)

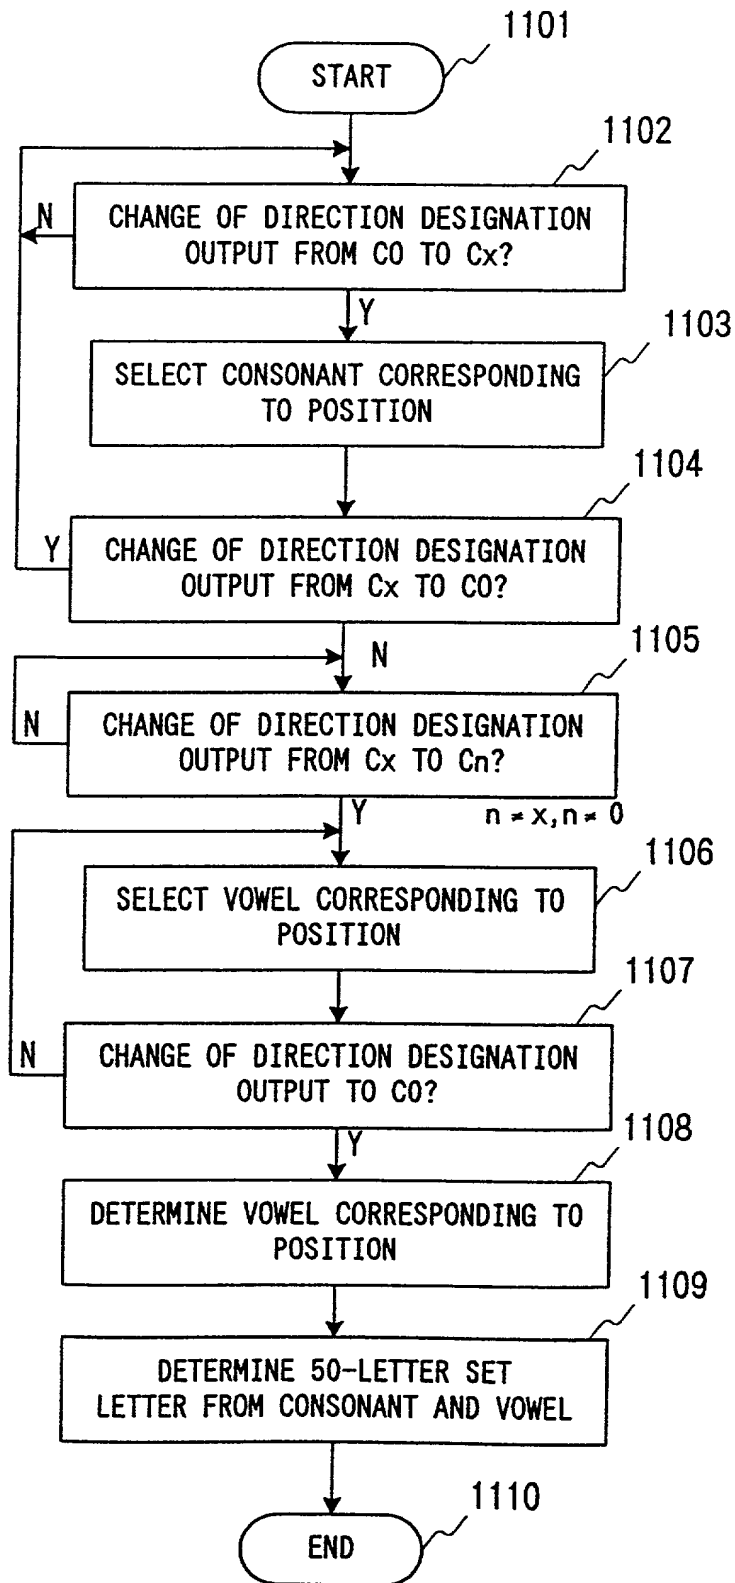


FIG.11 (b)

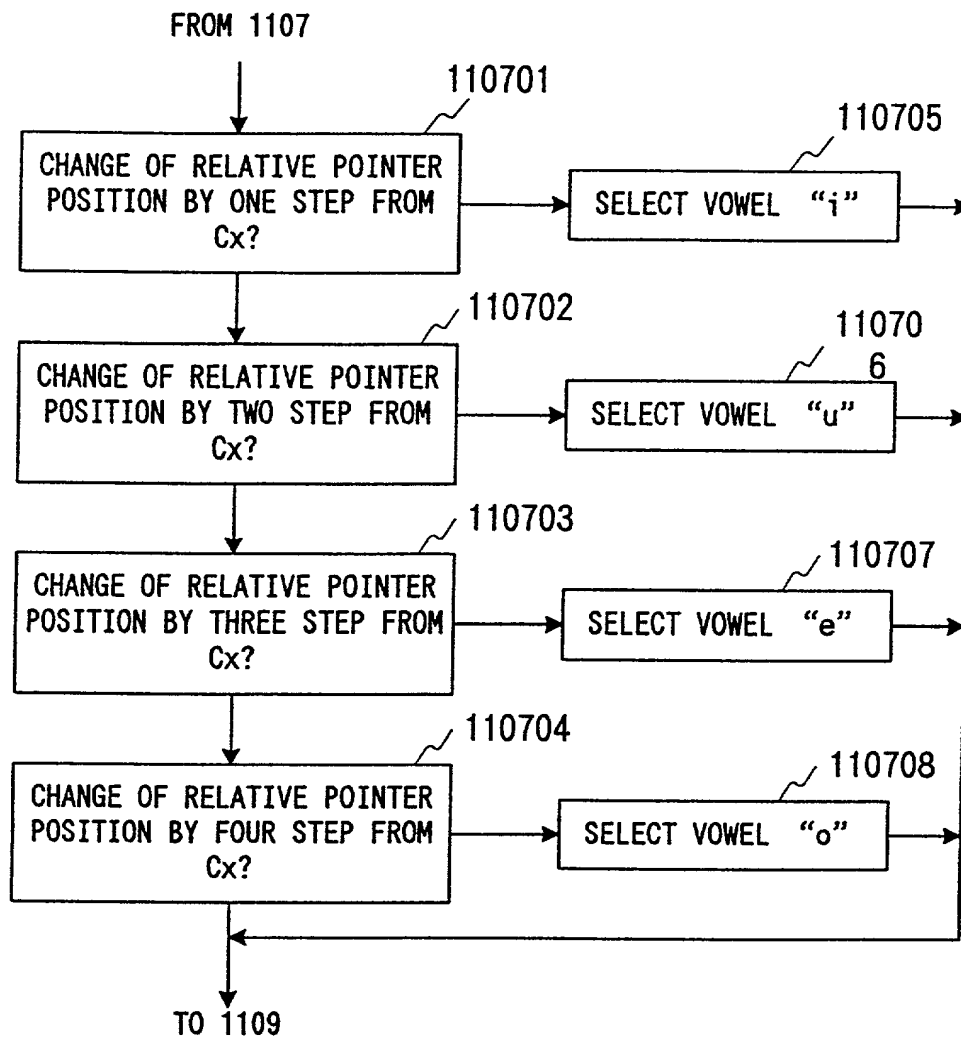


FIG.12


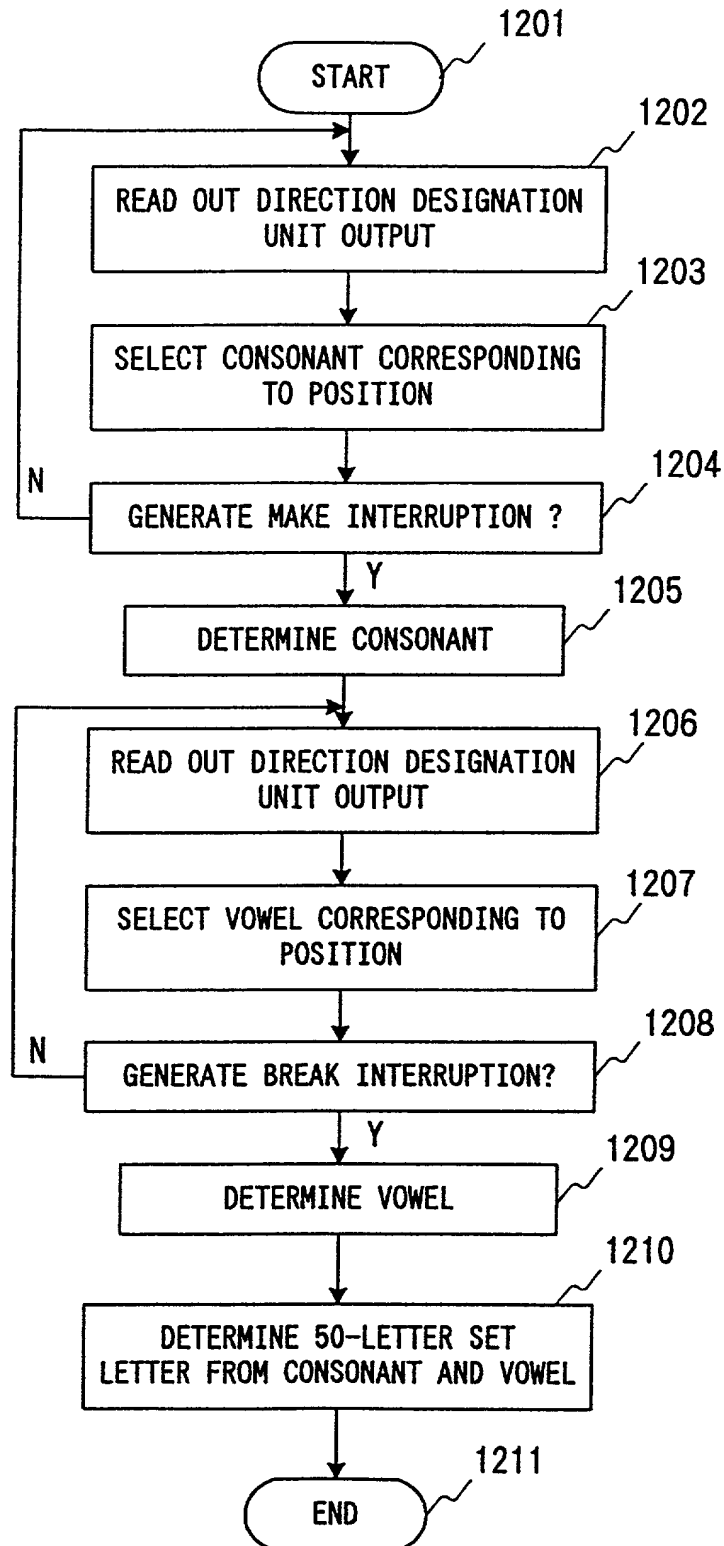


FIG.13

(a)

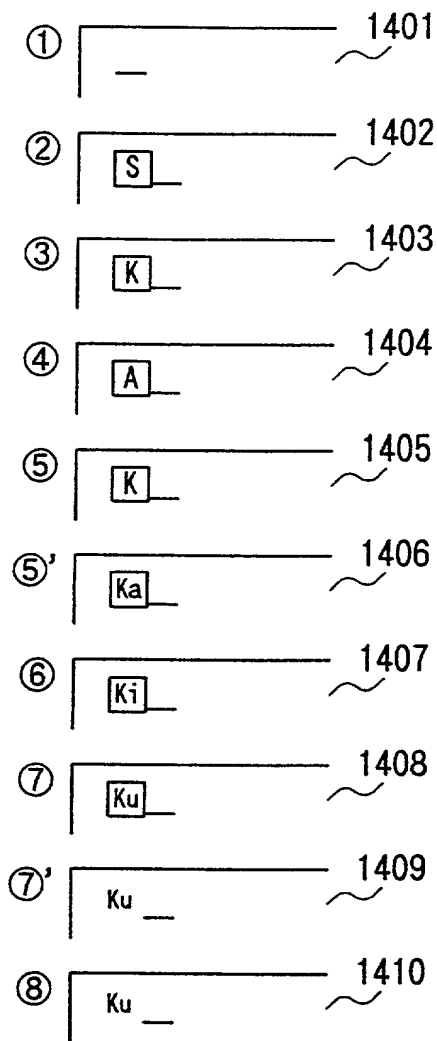

JAPANESE CHARACTER		ROMAN ALPHABET	
あ	=	a	1421
い	=	i	1422
う	=	u	1423
え	=	e	1424
お	=	o	1425
か	=	Ka	1426
さ	=	Sa	1427
た	=	Ta	1428
な	=	Na	1429
	:		

(b)

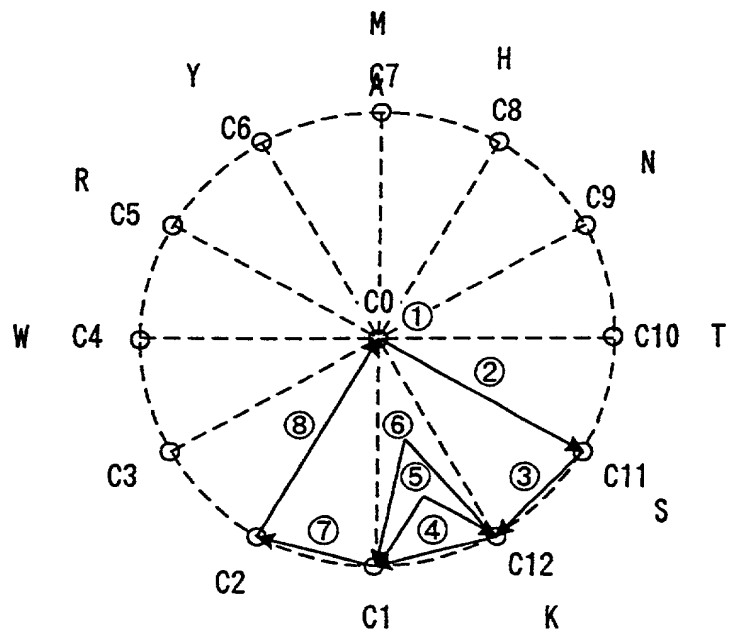


FIG.14

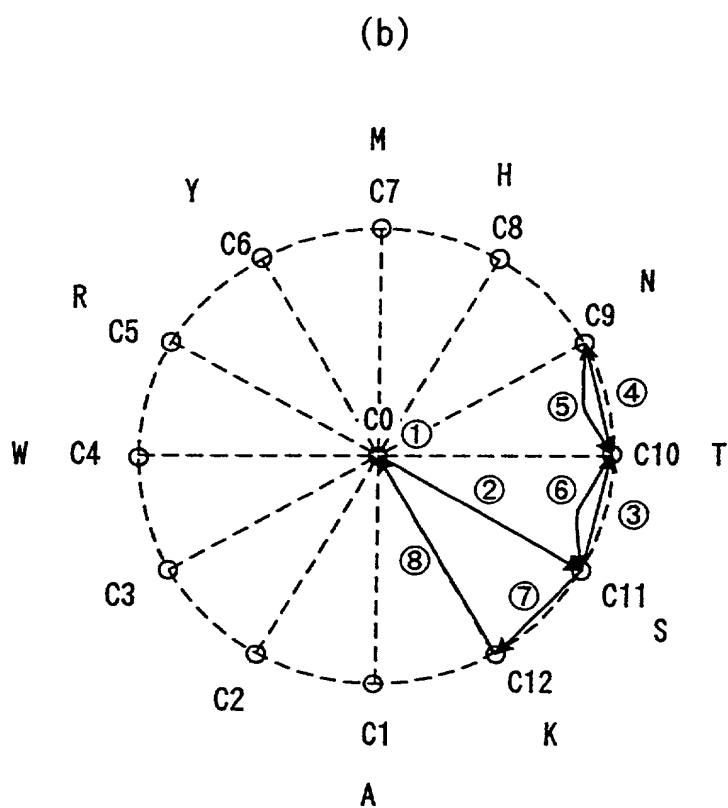
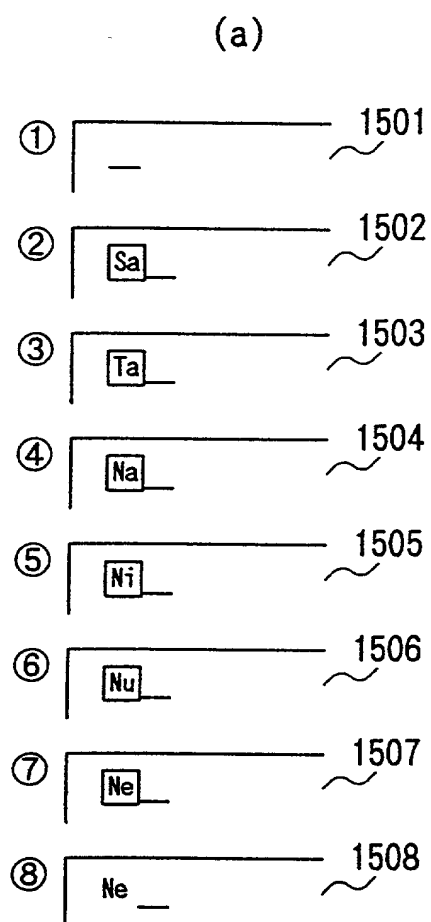


FIG.15

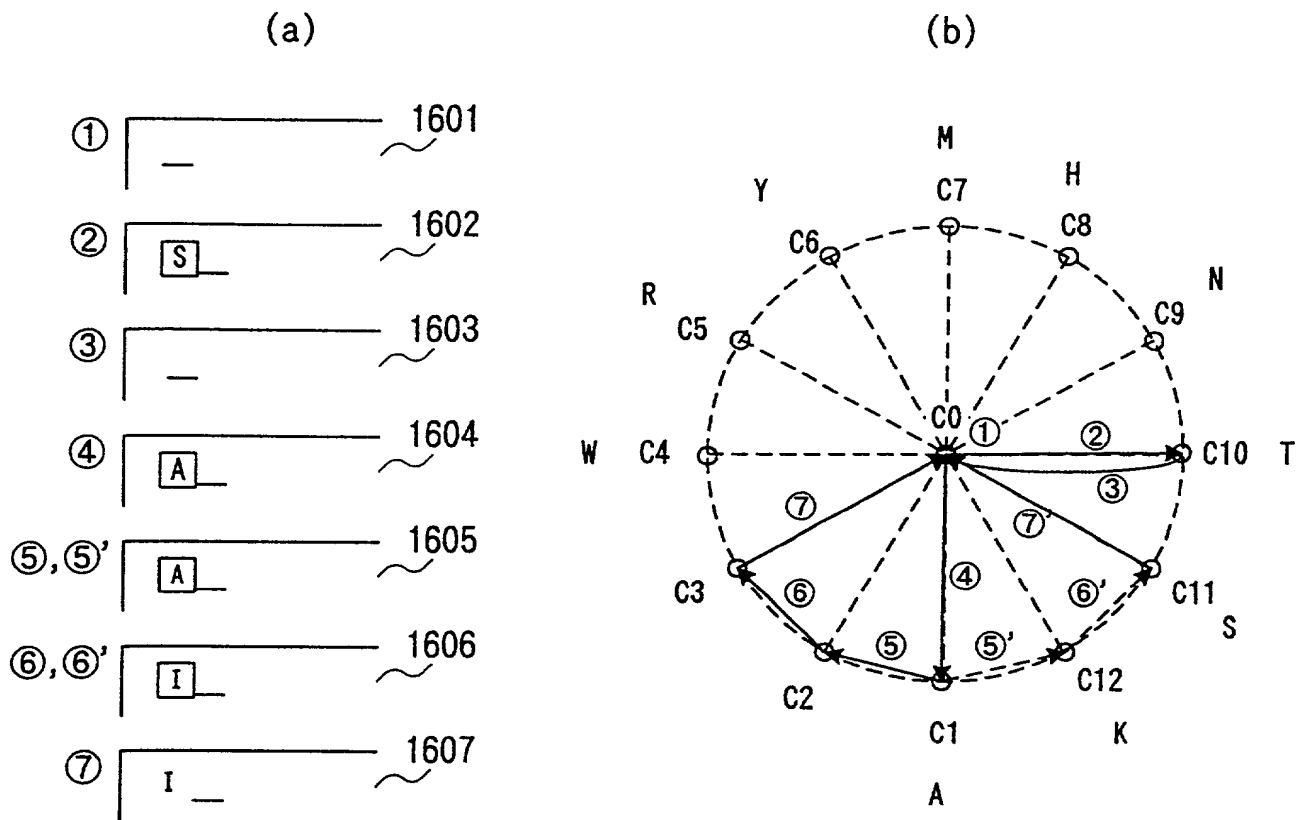


FIG.16

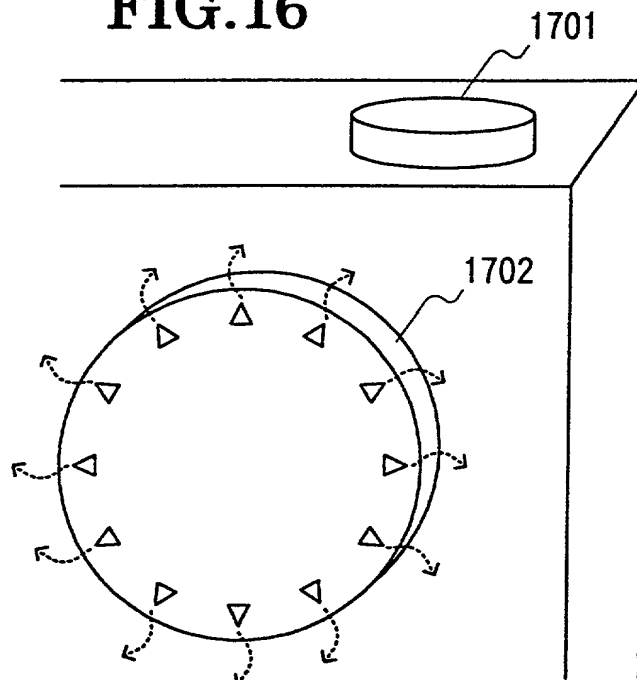


FIG.17

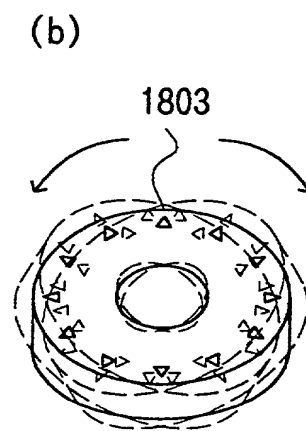
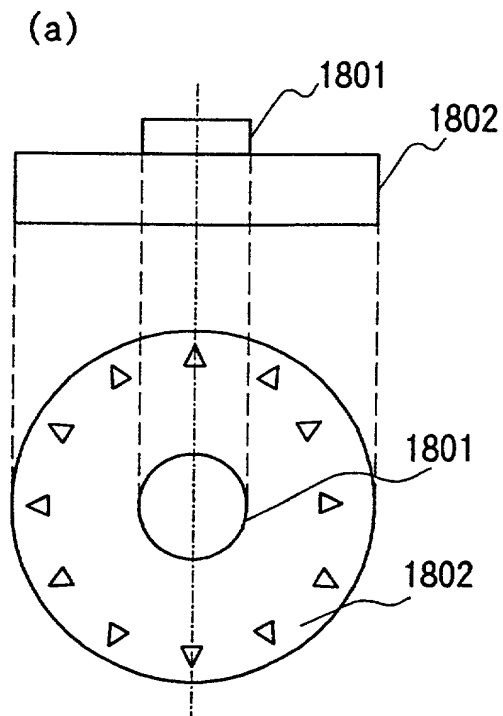


FIG.18




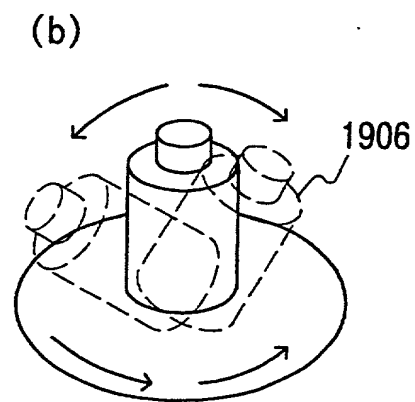


FIG.19


(a)

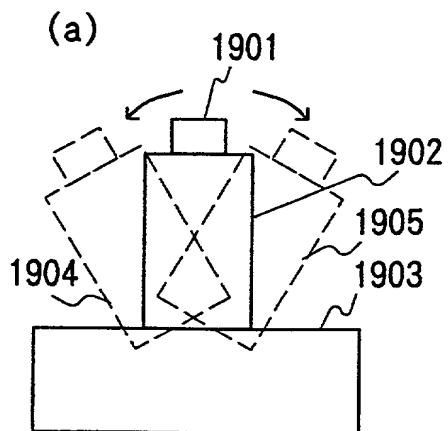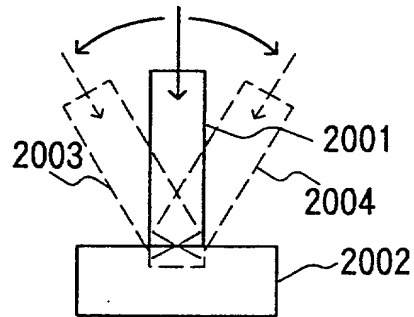

(b)



(c)

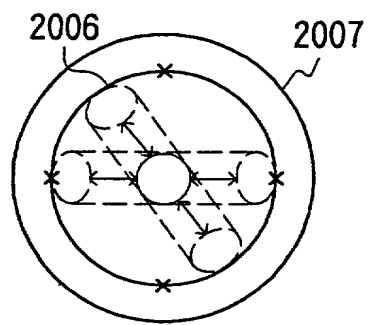

(d)




FIG.20

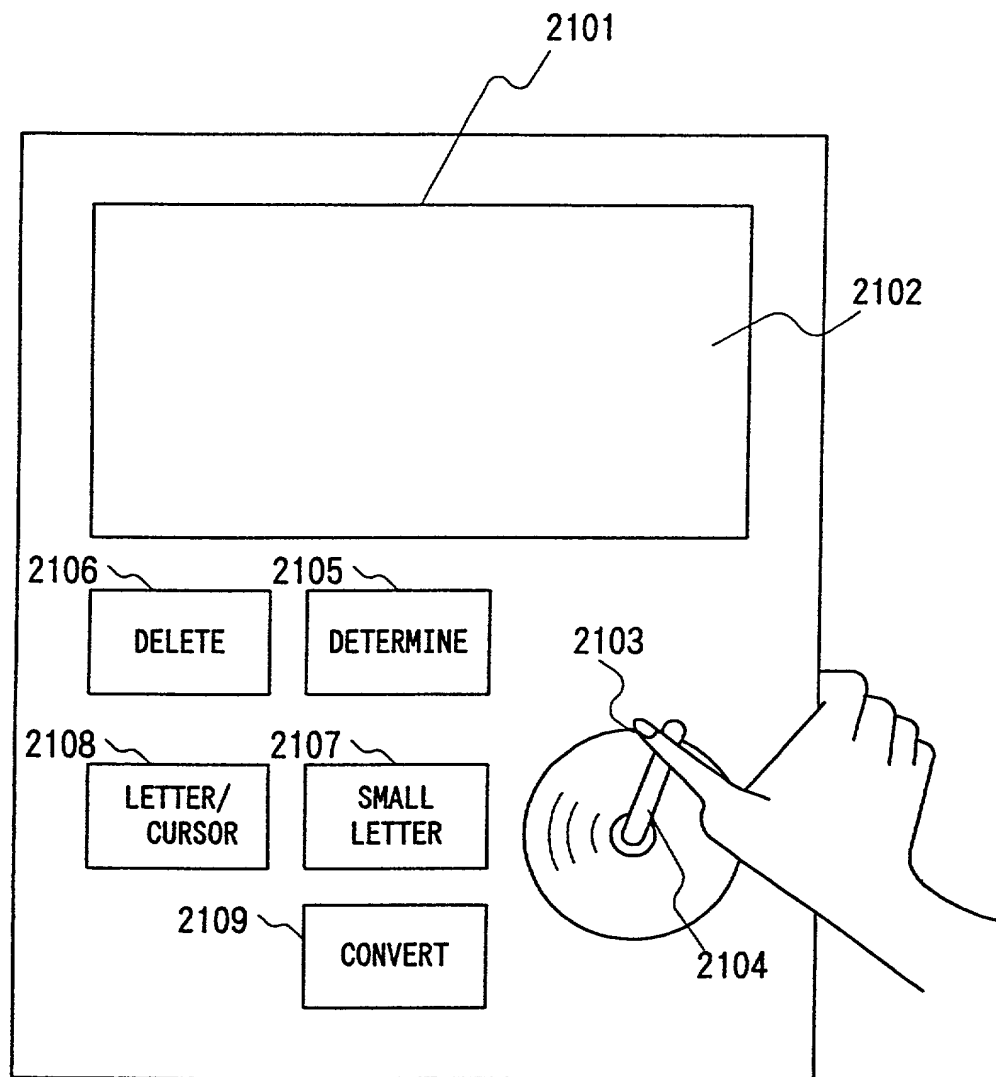


FIG.21



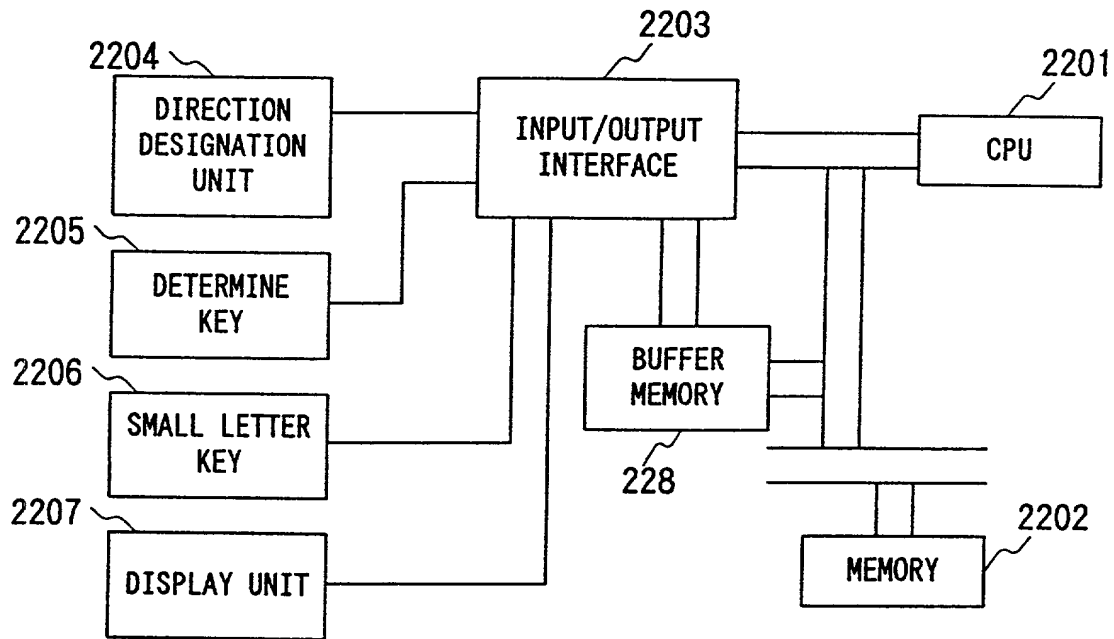


FIG.22


(a)

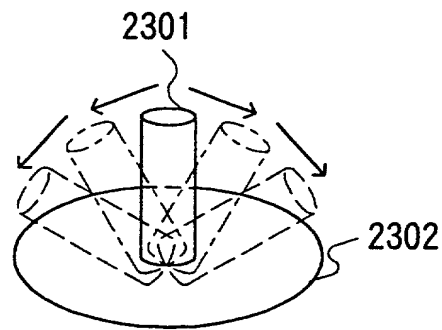


(b)

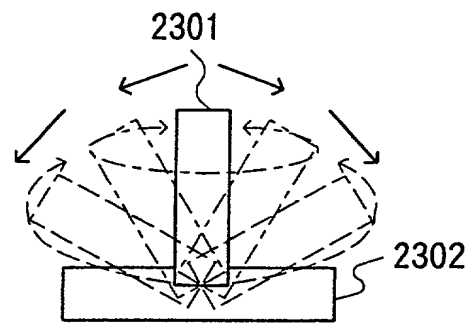

(c)



(d)



(e)




FIG.23

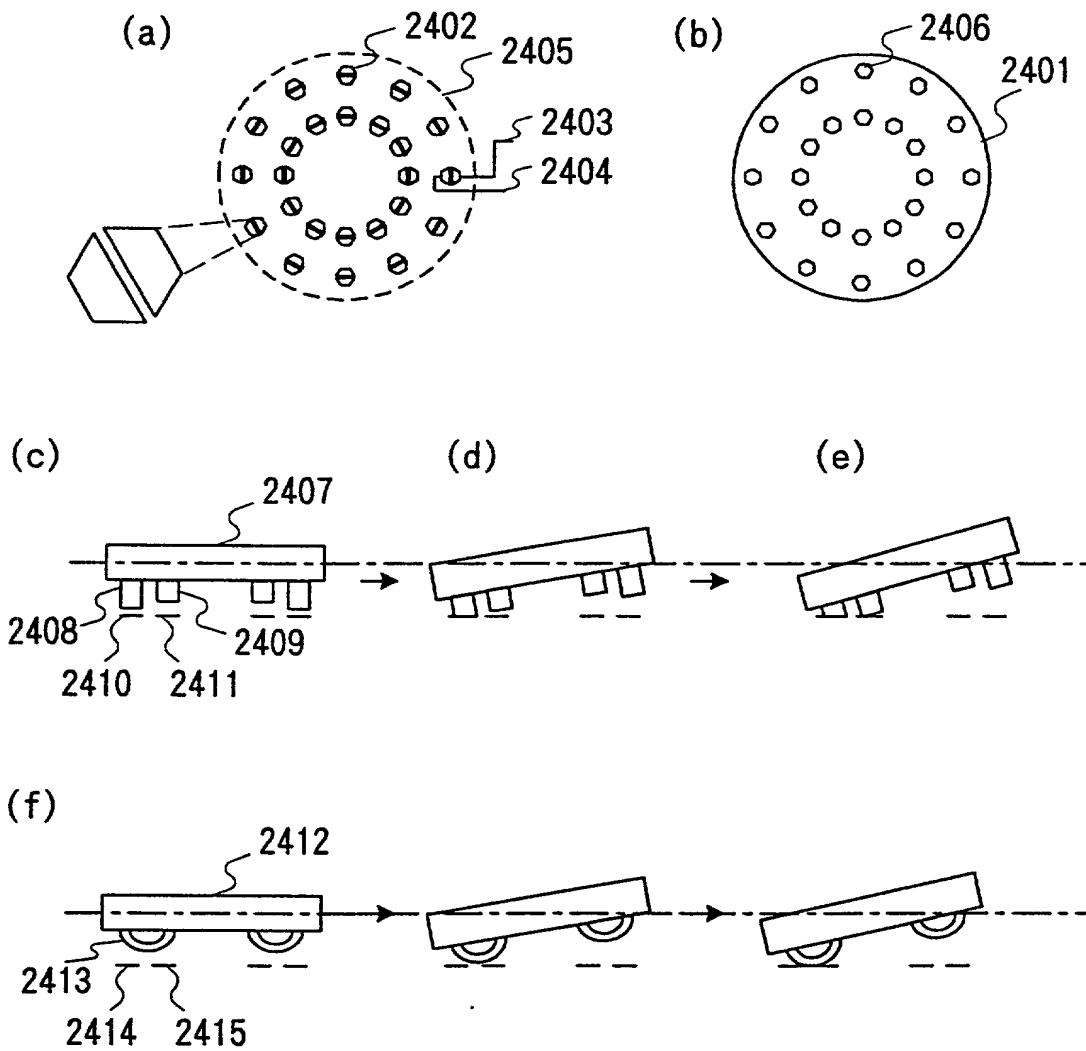


FIG.24

(a)

STATE	OUTPUT(BINARY)
C0-1	0000000000000
C1-1	00000000000001
C2-1	00000000000010
C3-1	000000000000100
C4-1	0000000000001000
C5-1	0000000010000
C6-1	00000000100000
C7-1	0000001000000
C8-1	0000010000000
C9-1	0000100000000
C10-1	0001000000000
C11-1	0010000000000
C12-1	0100000000000
WITHOUT USE	1000000000000
C1-2	10000000000001
C2-2	10000000000010
C3-2	100000000000100
C4-2	1000000000001000
C5-2	1000000010000
C6-2	1000000100000
C7-2	1000001000000
C8-2	1000010000000
C9-2	1000100000000
C10-2	1001000000000
C11-2	1010000000000
C12-2	1100000000000

(b)

STATE	OUTPUT (HEXADECIMAL)
C0-1	00h
C1-1	01h
C2-1	02h
C3-1	03h
C4-1	04h
C5-1	05h
C6-1	06h
C7-1	07h
C8-1	08h
C9-1	09h
C10-1	0Ah
C11-1	0Bh
C12-1	0Ch
C12-1	0Dh
WITHOUT USE	0Eh
WITHOUT USE	0Fh
WITHOUT USE	10h
C1-2	11h
C2-2	12h
C3-2	13h
C4-2	14h
C5-2	15h
C6-2	16h
C7-2	17h
C8-2	18h
C9-2	19h
C10-2	1Ah
C11-2	1Bh
C12-2	1Ch
WITHOUT USE	1Dh
WITHOUT USE	1Eh
WITHOUT USE	1Fh

Year	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

本発明を使用する事で、劣向指示入力の倒す角度により機能を切替え、一つの入力で2種類の操作が出来るようにする。



本発明を使用する事で、方向指示入力の倒折角度により機能を切替え、一つの入力で2種類の操作が出来るようにする。



本発明を使用する事で、方向指示入力の倒す角度により機能の切り替え、一つの入力で2種類の操作が出来るようにする。

本発明を使用する
事で、方向指示入力
の倒す角度により
機能を切替え、一つ
の入力で2種類の操
作が出来るように
する。




事で、方向指示入力
の倒す角度により
機能を切替え、一つ
の入力で2種類の操
作が出来るように
する。



力の倒す角度により機能を切替え、一つの入力で2種類の操作が出来るようにする。

FIG.26

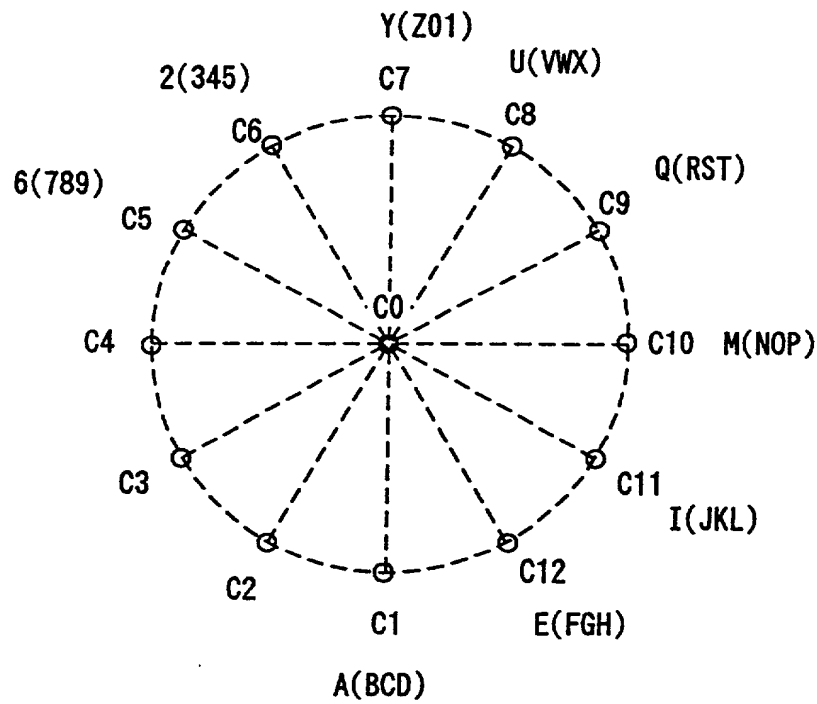

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
LETTER INPUT METHOD AND DEVICE USING THE SAME
the specification of which:

(check
one)

☒ is attached hereto

☐ was filed on _____, as
Application Serial No. _____
and was amended on _____.
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56*

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			priority claimed
319372/1998	JAPAN	10/11/1998	X
(Number)	(Country)	(Day/Month/Year Filed)	yes no
(Number)	(Country)	(Day/Month/Year Filed)	yes no
(Number)	(Country)	(Day/Month/Year Filed)	yes no

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status: patented, pending, abandoned)

Power of Attorney: As a named inventor, I hereby appoint C. Lamont Whitham, Reg. No. 22,424, Marshall M. Curtis, Reg. No. 33,138, and Michael E. Whitham, Reg. No. 32,635, Reg. 34,386 as attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to Whitham, Curtis & Whitham, Reston International Center, 11800 Sunrise Valley Dr., Suite 900, Reston, Virginia 20191. Telephone calls should be directed to Whitham, Curtis & Whitham at (703) 391-2510.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor MITSUHIRO WATANABE

Inventor's Signature Mitsuhiko Watanabe Date 01/11/1999

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan

Full Name of Second Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Third Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Fourth Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

Full Name of Fifth Joint Inventor, If Any _____

Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

*Title 37, Code of Federal Regulations, § 1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith toward the Patent and Trademark Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability; or (2) it refutes, or is inconsistent with, a position the applicant takes in: (i) opposing an argument of unpatentability relied on by the Office, or (ii) asserting an argument of patentability.